

ADAYO

2021

PROFESSIONAL LED

**LIGHTING
PRODUCTS**

CATALOGUE



adayo-led



adayoled

ADAYO

HUIZHOU FORYOU OPTOELECTRONICS TECHNOLOGY CO., LTD.

T : +86-752-5300 980 +86-752-5300 979
+86-752-5300 977 +86-752-5300 601
F : +86-752-5300 099 E : info@adayoled.com

A : Foryou Industrial Park Area B, No.1 North Shangxia Road,
Dongjiang Hi-tech industry Park, Huizhou, Guangdong Province, P R China

www.adayoled.com

INDEX

■ LED SMART LIGHT

Smart Light Source	009 - 014
Smart Down Light	015 - 018
Smart Fire Rated Down Light	019 - 020
Smart Ceiling Light	021 - 024

■ LED SPOT LIGHT

DIY Recessed Spot Light	029 - 036
360° Rotatable Spot Light	037 - 042
Fire Rated Down Light	043 - 049
Deep Recessed Spot Light	051 - 052
GU10 & Module	053 - 056
Deco Spot Light	057 - 066
Mini Spot Light	067 - 070

■ LED DOWN LIGHT

Flat Down Light	073 - 080
Deep Recessed Down Light	081 - 084
Ceiling Light	085 - 088
Cabinet Light	089 - 090

SMART LIGHTING



Product Index

Smart Light Source



WL001-A60201
009



WL001-BR3001
010



WL001-GUM1101
011



WL001-GUM2201
012



WL001-GU10101
013



WL001-GU10201
014

Smart Down Light



WL001-G3A101
015



WL001-G3A301
016



WL001-D1701
017



WL001-NAD401
018

Smart Fire Rated Down Light



WL001-FG3A03
019



WL001-D36A03
020

Smart Ceiling Light



WCL002-300
021



WPDL001-606D
022



CL003-W11
023



CL004-W12
024





▲ Foryou Industrial Park

PROFILE

Foryou Corporation

Established in **1993**, listed in **2017**
 Leading in auto electronics of China
2,000+ R&D engineers
 Auto Industry Quality Control System
560,000 square meters industrial park

Top 100 Electronic Information Enterprises Of China
Top 100 Enterprises In Guangdong
Top 500 Manufacturers of China
500 Most Influential Brands of Asian

About us



Huizhou Foryou Optoelectronic Technology Co., Ltd (ADAYO lighting) is a wholly-owned subsidiary of Foryou corporation, which entered the LED packaging industry in 2006, and established in 2012 with registered capital of 32 million US dollar. There are three business lines: LED package, LED high power driver and LED lighting.



Our lab covers an area of 1200m² which complies international standard and has more than 100 test equipments. Thus, we can do safety test, reliability test, photoelectric parameter test, dropping and shaking test, EMI and EMC test. Our factory is qualified with ISO9001, ISO14001 and the products can pass CE/CB/FCC/UL/SAA/BS476-20/BS476-21 and other international certifications.



Our professional sales team can provide consulting sales services for different markets; Our R&D team with more than 60 people, one third of them with more than 20 years of experience in the lighting industry. A new range of product will be launched every one month in average.


The rigorous quality team, controls quality with industry standard from the incoming materials, production, and finished products providing strong quality support for your sales.



There are more than 300 workers and 50 production lines of LED package, LED high power driver and LED lighting, including 30 automatic and semi-automatic lines, with a monthly capacity of 2 million pcs LED down light, LED ceiling light, LED spot light, LED smart light.

ADAYO lighting adheres to the spirit of hard work in the manufacturing industry, persists in reform and innovation, and joins hands with customers and peers from all walks of life to seek common development and win-win cooperation.

Certification

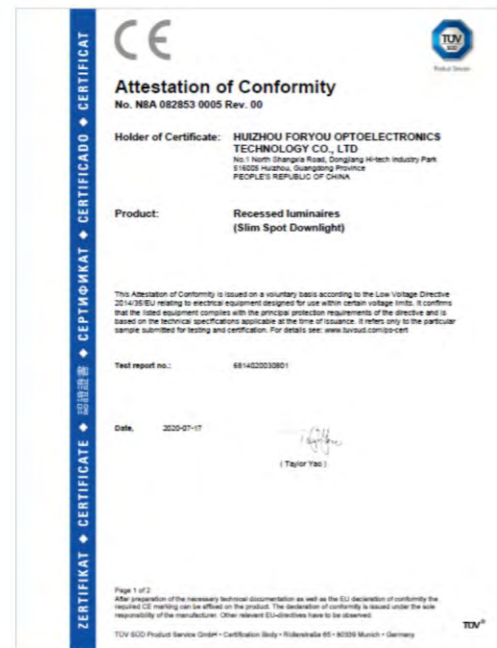

Three Main Business



LED Package



LED High Power Driver



LED Lighting

Smart Home System



LED Smart Products




Technical comparison

	Bluetooth	zigbee	WiFi	Sig mesh
Communication	Independent	Mesh	Network	Mesh
Long range control	/	Need Gateway	/	Need Gateway
Devices connect number	8	<10-100	<10-100	Over 150
Coverage area	<10m	10-75m	10-50m	Theoretically no limit with 2 Devices in 100m
PowerConsumer	Low	Medium	High	Low
Setup	Simple	Complex	Simple	Simple
Cost	Cheap	Expensive	Expensive	Cheap
Network size	Small	Medium	Medium	Big
Response speed	Fast	Slow	Slow	Fast
Security level	High	High	Low	High
Network Stability	Stable	Stable	Unstable	Stable

Features:

- Voice & APP control, No gateway required with WIFI devices
- Dim, CCT, RGBCW function optional
- 16,000,000 colors in RGB mode
- Work with Google Assistant, Amazon Alexa
- Work with Sensor, Remote control simplifies operation in Bluetooth devices

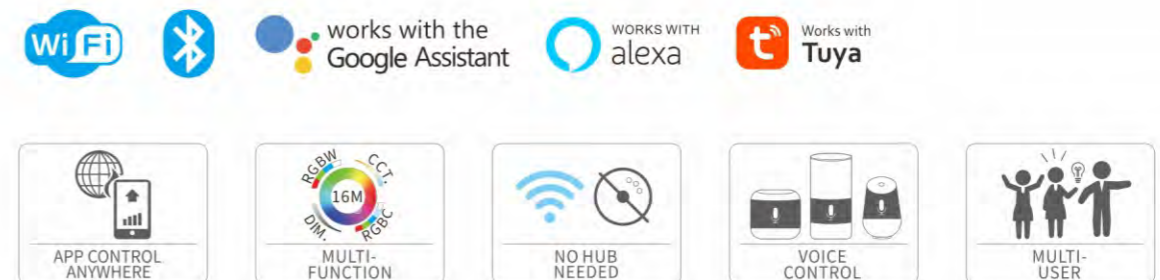

SMART BULB



BASE: E27



BASE: B22



BASE: E26



Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.


Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC100V / AC230V optional



Model	Wattage	Lumen	CCT	Beam	Base type	Dimensions
WL001-A60202	9W	806lm	2700K~6500K	180°	E26/E27/B22	φ60x119mm
WL001-A60205			2200K~6500K+RGB			
BL001-A60202	9W	806lm	2700K~6500K	180°	E26/E27/B22	φ60x119mm
BL001-A60205			2700K~6500K+RGB			

SMART BR30

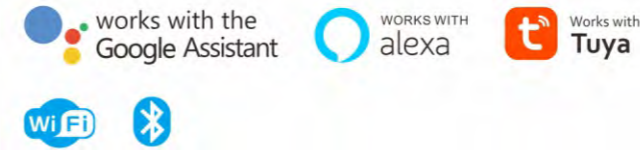


Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Base type	Dimensions
WL001-BR3002	12W	1200lm	2700K~6500K	120°	E26	φ95x128mm
WL001-BR3005			2700K~6500K+RGB			
BL001-BR3002	12W	1200lm	2700K~6500K	120°	E26	φ95x128mm
BL001-BR3005			2700K~6500K+RGB			

SMART GUM1



WL001-GUM1101



WL001-GUM1201



Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.


Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- Replace wifi GU10 easily
- AC230V



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GUM1102			2700K~6500K		
WL001-GUM1105	6W	500lm	2700K~6500K+RGB	100°	φ50x43mm
BL001-GUM1102			2700K~6500K		
BL001-GUM1105	6W	500lm	2700K~6500K+RGB	100°	φ50x43mm
WL001-GUM1202			2700K~6500K		
WL001-GUM1205	6W	500lm	2700K~6500K+RGB	38°	φ50x43mm
BL001-GUM1202			2700K~6500K		
BL001-GUM1205	6W	500lm	2700K~6500K+RGB	38°	φ50x43mm

SMART GUM2

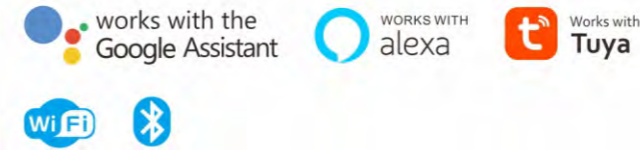

WL001-GUM2201



WL001-GUM2101




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- Replace wifi GU10 easily
- AC230V



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GUM2102			2700K~6500K		
WL001-GUM2105	6W	450lm	2700K~6500K+RGB	38°	φ50x53mm
BL001-GUM2102			2700K~6500K		
BL001-GUM2105	6W	450lm	2700K~6500K+RGB	38°	φ50x53mm
WL001-GUM2202			2700K~6500K		
WL001-GUM2205	6W	450lm	2700K~6500K+RGB	100°	φ50x53mm
BL001-GUM2202			2700K~6500K		
BL001-GUM2205	6W	450lm	2700K~6500K+RGB	100°	φ50x53mm

SMART GU101




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.


Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC230V



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GU10102	4.8W	350lm	2700K~6500K	100°	φ50x60mm
WL001-GU10105			2700K~6500K+RGB		
BL001-GU10102	4.8W	350lm	2700K~6500K	100°	φ50x60mm
BL001-GU10105			2700K~6500K+RGB		

SMART GU102

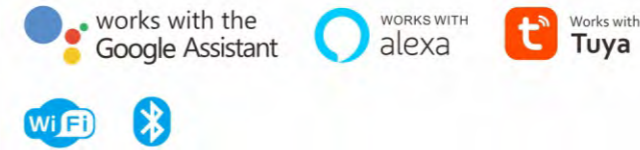


Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC230V



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GU10202	4.8W	350lm	2700K~6500K	38°	φ50x54mm
WL001-GU10205			2700K~6500K+RGB		
BL001-GU10202	4.8W	350lm	2700K~6500K	38°	φ50x54mm
BL001-GU10205			2700K~6500K+RGB		

SMART DOWN LIGHT-G3A1




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.


Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-G3A102	4.8W	320lm	2700K~6500K	100°	φ70mm	φ86x47mm
WL001-G3A105			2700K~6500K+RGB			
BL001-G3A102	4.8W	320lm	2700K~6500K	100°	φ70mm	φ86x47mm
BL001-G3A105			2700K~6500K+RGB			

SMART DOWN LIGHT-G3A3

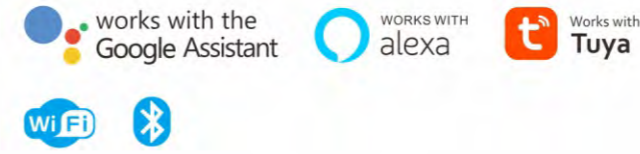


Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.


Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music

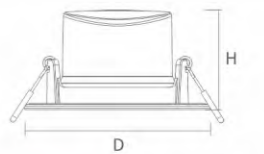

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-G3A302	4.8W	320lm	2700K~6500K	38°	φ70mm	φ86x47mm
WL001-G3A305			2700K~6500K+RGB			
BL001-G3A302	4.8W	320lm	2700K~6500K	38°	φ70mm	φ86x47mm
BL001-G3A305			2700K~6500K+RGB			

SMART DOWN LIGHT-D1701

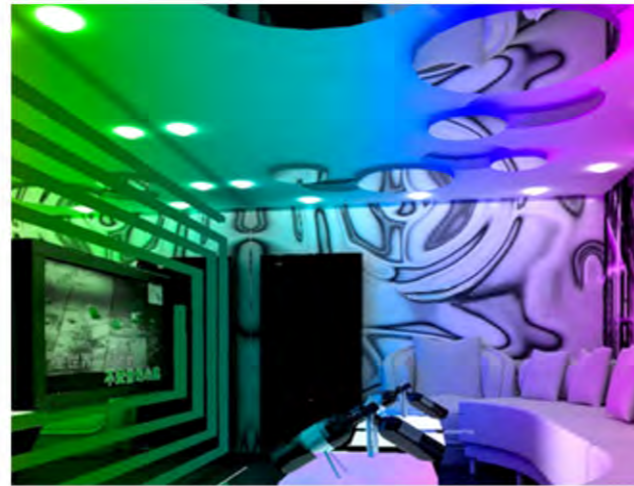


Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.



Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-D1702	15W	1350lm	2700K~6500K	100°	φ150mm	φ170x48mm
WL001-D1705			2700K~6500K+RGB			
BL001-D1702	15W	1350lm	2700K~6500K	100°	φ150mm	φ170x48mm
BL001-D1705			2700K~6500K+RGB			

SMART DOWN LIGHT-NA

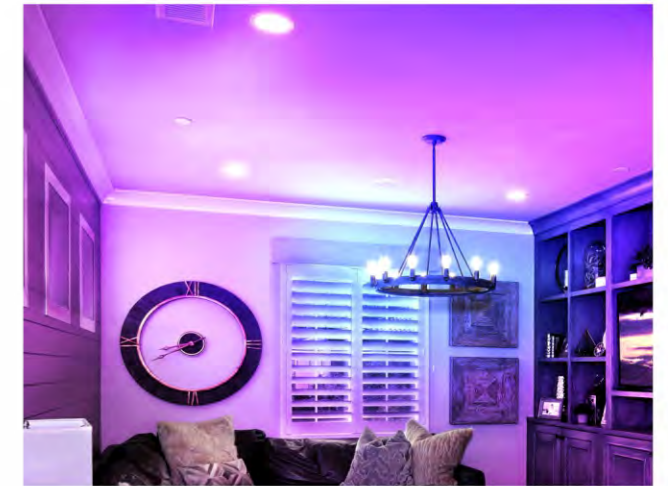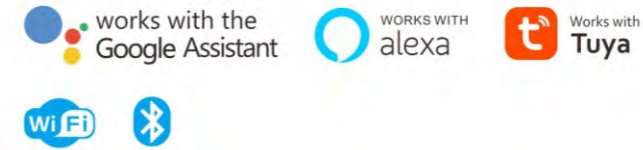


Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music




Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-NAD402	10W	800-850lm	2700K~6500K	60°	φ100mm	φ140x56mm
WL001-NAD405			2700K~6500K+RGB			
BL001-NAD402	10W	800-850lm	2700K~6500K	60°	φ100mm	φ140x56mm
BL001-NAD405			2700K~6500K+RGB			
WL001-NAD602	15W	1200-1275lm	2700K~6500K	60°	φ150mm	φ186x56mm
WL001-NAD605			2700K~6500K+RGB			
BL001-NAD602	15W	1200-1275lm	2700K~6500K	60°	φ150mm	φ186x56mm
BL001-NAD605			2700K~6500K+RGB			

SMART FIRE RATED DOWN LIGHT



IP65

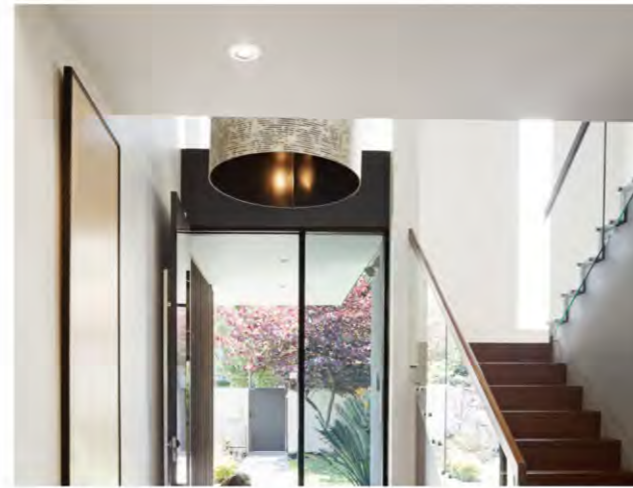

Application

Home, Hotels

Color of Bezels optional:



Features:

- Smart Life APP control, no gateway required
- Dim and CCT
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Fire rated 30', 60', 90' .

Fire-rated

Adopt flame retardant material, safe and secure




Tool-free

Tool-free design save the installation cost



Insulation Cover

Can be covered by insulation directly

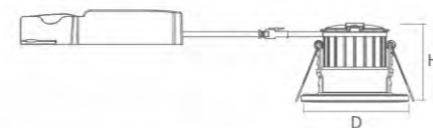


Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-FG3A03	8.5W	700lm	3000K~6500K	60°	φ70mm	φ88x65mm
BL001-FG3A03						

SMART 360° FIRE RATED DOWN LIGHT



IP65

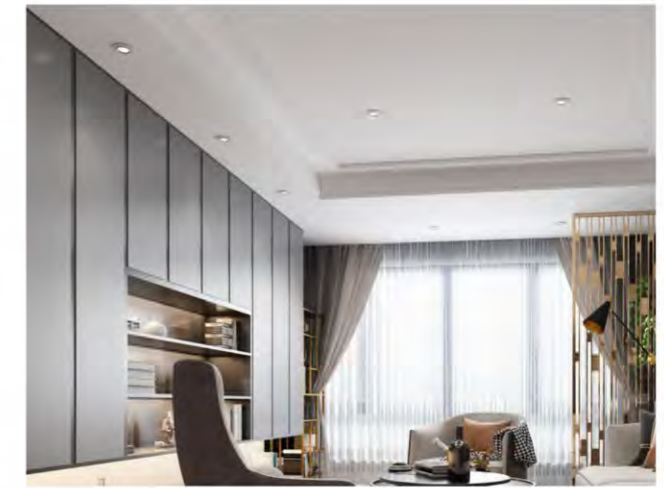

Application

Home, Hotels

Three color finishing optional



Features:

- Smart Life APP control, no gateway required
- Dim and CCT , 360° rotation
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Fire rated 30', 60', 90'
- Tooling free design

Fire-rated

Adopt flame retardant material, safe and secure



360° Rotation

Can be adjusted angle according to the subject




Tool-free

Tool-free design save the installation cost



Insulation Cover

Can be covered by insulation directly



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
WL001-D36A03	8.5W	720lm	3000K-6500K	38°	Black/White/Silver	φ85mm	φ96x40mm
BL001-D36A03							

SMART CEILING LIGHT



Wood



White+Wood



White



Black





Application

Bedroom, Livingroom, Corridor, Aisle, Circulation area

Features:

- Plastic frame with wood, white and black finishing. Unique colors clashing design is available
- PMMA diffuser, light transmittance is up to 80%
- 25000 hours lifespan, high lighting efficiency 90lm/w
- CE, RoHS and new ERP 2019/2015 compliant
- WiFi function is optional



Model	Wattage	Lumen	Efficacy	CCT	Beam	Dimensions
WCL002-300	21W	1900lm	90lm/W	2700K-6500K	100°	φ300x50mm
WCL002-450	28W	2800lm	100lm/W			φ450x60mm
BCL002-300	21W	1900lm	90lm/W	2700K-6500K	100°	φ300x50mm
BCL002-450	28W	2800lm	100lm/W			φ450x60mm

SMART CEILING LIGHT



Application


Corridor, Aisle, Circulation area

Features:

- Adjustable buckle cut size φ 50-260mm
- Dimming , non-dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm

Cut Out

For φ50mm-φ260mm cut hole




Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



Color of Bezels optional:



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WPDL001-606D	6W	480lm	2700K-6500K	110°	φ50-125mm	φ165x22mm
WPDL001-612D	12W	960lm			φ50-125mm	φ165x22mm
WPDL001-818D	18W	1620lm	2700K-6500K	110°	φ65-185mm	φ217x22mm
WPDL001-1121D	21W	1900lm			φ65-260mm	φ290x22mm
WPDL001-1123D	23W	2100lm	2700K-6500K	110°	φ65-260mm	φ290x22mm
BPDL001-606D	6W	480lm			φ50-125mm	φ165x22mm
BPDL001-612D	12W	960lm	2700K-6500K	110°	φ50-125mm	φ165x22mm
BPDL001-818D	18W	1620lm			φ65-185mm	φ217x22mm
BPDL001-1121D	21W	1900lm	2700K-6500K	110°	φ65-260mm	φ290x22mm
BPDL001-1123D	23W	2100lm			φ65-260mm	φ290x22mm

SMART CEILING LIGHT



Surface-mounted



Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant




Pendant (with long pole)



Pendant (with metal wire)


Features:

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- 5 years warranty



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL003-W11	15W	1500lm	2700K-6500K	100lm/W	120°	φ300x80mm
CL003-W15	25W	2000lm				φ480x80mm
CL003-W24	50W	4000lm				φ600x80mm
CL003-B11	15W	1500lm	2700K-6500K	100lm/W	120°	φ300x80mm
CL003-B15	25W	2000lm				φ480x80mm
CL003-B24	50W	4000lm				φ600x80mm

SMART CEILING LIGHT

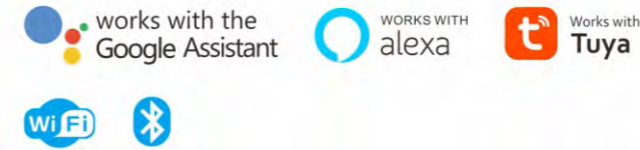

White



Black



Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features:

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- UGR 19
- 5 years warranty



Ultra-slim

Ultra-slim design for narrow space



2 installations

Surface-mounted and pendant



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
CL004-W12	15W	1500lm	2700K-6500K	120°	Black/White	φ300x551mm
CL004-W16	25W	2000lm				φ480x551mm
CL004-W24	40W	4000lm				φ600x551mm
CL004-B12	15W	1500lm	2700K-6500K	120°	Black/White	φ300x551mm
CL004-B16	25W	2000lm				φ480x551mm
CL004-B24	40W	4000lm				φ600x551mm

LED SPOT LIGHT

- DIY Recessed Spot Light
- 360° Rotatable Spot Light
- Fire Rated Down Light
- Deep Recessed Spot Light
- GU10 & Module
- Deco Spot Light
- Mini Spot Light



LED Spot Light

DIY ECO Recessed Spot Light



SL001-C01 030 SL001-C02 030 SL001-C03 030 SL001-D01 031 SL001-D02 031

DIY Recessed Spot Light



SL001-A01 033 SL001-A02 033 SL001-A03 033 SL001-E01 034 SL001-E02 034 SL001-B01 036 SL001-B02 036

360° Rotatable Spot Light



SL360-A01 038 SL360-B01 038 SL360-A02 039 SL360-B02 039 SL361D 041 SL361-C1 042

Fire Rated Down Light



SL002-A02 044 SL002-A01 045 SL002-A03 046 SL002-B01 047 SL002-C01 048 SL360-A03 049 SL361-A03 050

Deep Recessed Spot Light



SL015-W044 051 SL015-N044 051 SL005-A 052

GU10 & Module



SL003-A01 054 SL003-B01 054 SL003-GU10 054 SL003-GU10B 055

LED Spot Light

Deco Spot Light



SP001-A01B 058 SP001-A02B 058 SP001-A03B 058 SP001-A04B 058



SP001-B01B 059 SP001-B02B 059 SP001-B03B 059 SP001-B04B 059




SP001-C01B 060 SP001-C02B 060 SP001-C03B 060 SP001-C04B 060



SP001-D01B 061 SP001-D03B 061

Deco Spot Light

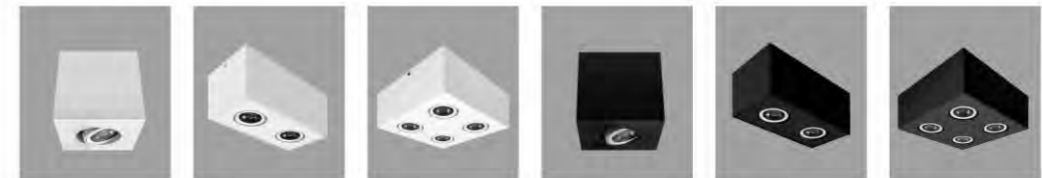

SP001-E01W 064 SP001-E02W 064 SP001-E04W 064 SP001-01B 064 SP001-02B 064 SP001-04B 064

Mini Spot Light



SP002-10W(White) 065 SP002-10W(Black) 065



SL004-A1 068 SL004-A3 069

DIY

RECESSED SPOT LIGHT



Tool-free
2 pin loop in and loop out

Bezels optional:
Different bezels changeable easily.

CCT2/CCT3 optional

Brushed Nickel

Chrome Silver Black

AMBER



SL001-C02



SL001-C01




SL001-C03

Features:

- different colors of bezels optional
- IP20/IP44/IP65 optional
- Tooling free design save the installation cost
- Ultra-thin design suitable for narrow space

Water-proof

Front waterproof IP44/IP65



360° Rotation

Can be adjusted 360° on the horizontal plane



Ultra-slim


Ultra-slim design for narrow space



Application

Home, Office, Shop, Hotel etc.


Color of Bezels optional:

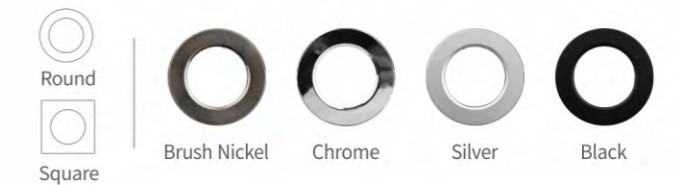

Accessories



Line Art

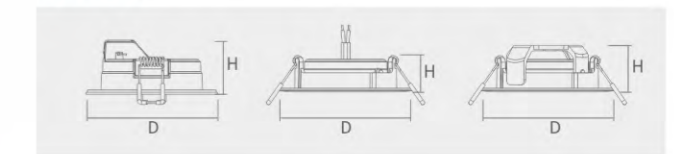

Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-C01	4.8W	400lm	2700K/3000K/4000K	100°	IP65	φ68mm	φ87x35mm
SL001-C02	4.8W	400lm	2700K/3000K/4000K	38°	IP44/IP20	φ68mm	φ87x24mm
SL001-C03	4.8W	400lm	2700K/3000K/4000K	38°	IP44/IP20	φ68mm	φ87x30mm

HILDIGARD



IP65

SL001-D01



SL001-D02



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional:



Black

Features:

- Front waterproof IP65
- Die-casting face ring with different color optional
- CCT3 and single color optional


Water-proof

Front waterproof IP65



CCT3

CCT3 changeable switch on back



Slim body

Slim body for narrow space installation



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL001-D01	7W	500lm	CCT3	38°	φ75mm	φ85x30mm
SL001-D02	7W	500lm	CCT3	38°	φ75mm	φ85x30mm



SOFIA



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional:



Features:

- Different colors bezels optional
- IP20/IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Water-proof

Front waterproof IP44/IP65 available



CCT3

CCT3 changeable switch on back



Screw free

Screw free design save the installation cost



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-A01D	7W	500lm	3000K/4000K/6500K	100°	IP65	φ68mm	φ87x47mm
SL001-A01C	7W	500lm	CCT3				
SL001-A03D	5W	400lm	3000K/4000K/6500K	38°	IP44	φ68mm	φ87x47mm
SL001-A03C	5W	400lm	CCT3				
SL001-A02D	5W	400lm	3000K/4000K/6500K	100°	IP20	φ68mm	φ87x47mm

AVALOR



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional:



Features:

- Different colors bezels optional
- IP20/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Water-proof

Front waterproof IP44/IP65 available



CCT3

CCT3 changeable switch on back



Screw free

Screw free design save the installation cost



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-E01D	5.5W	450lm	3000K/4000K/6500K	38°	IP20	φ68mm	φ87x45mm
SL001-E01C	5.5W	450lm	CCT3				
SL001-E02D	7W	560lm	3000K/4000K/6500K	100°	IP65	φ68mm	φ87x46mm
SL001-E02C	7W	560lm	CCT3				

Accessories





CLIO




SL001-B02

IP44



SL001-B01

IP65

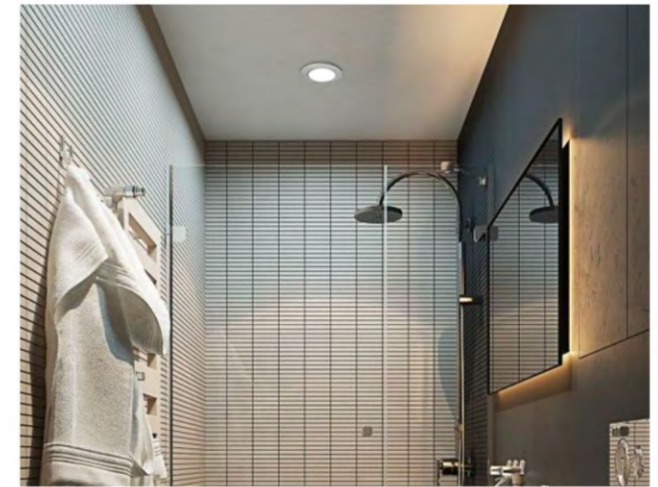

Application

Home, Office, Shop, Hotel etc.

Features:

- Different colors bezels can be changed easily
- IP44 and IP65 can be used into wet applications
- Tooling free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Color of Bezels optional:



Water-proof

IP44 and IP65 can be used into wet applications



CCT3

CCT3 changeable switch on back



Screw free

Screw free design save the installation cost




Accessories



Metal extra frame



Junction Box



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-B01D	10W	1000lm	3000K/4000K/6500K	100°	IP65	φ85mm	φ105x59mm
SL001-B01C	10W	1000lm	CCT3				
SL001-B02D	9W	750lm	3000K/4000K/6500K	38°	IP44	φ85mm	φ105x59mm
SL001-B02C	9W	750lm	CCT3				

360° ROTATABLE SPOT LIGHT

Screw free design
3pin loop in and loop out

CCT tunable
Select CCT by button before installation

Insulation coverable

Male and female plug
Quick installation and can easy change to other drivers

360° Rotation
Irradiation angle 360° horizontal adjustment, 30° tilt adjustment

Lens and reflector optional

SMD (Lens) COB (Reflector)

ROLAND I



Application

Home, Office, Shop, Hotel etc.

Finish optional



Features:

- Separated isolated driver with built in terminal
- Male & female plug between driver and lamp

Water-proof

Front waterproof IP65




360° Rotation

360° angle adjusted from all directions



Insulation Cover

Can be covered by insulation directly

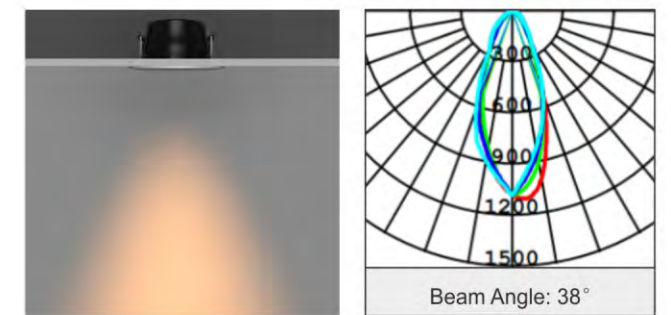

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A01DS	8.5W	720lm	3000K/4000K/6500K	38°	Black/White/Silver	φ78mm	φ96x40mm
SL360-A01DC	8.5W	720lm	CCT3				
SL360-B01DS	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ65mm	φ81x37mm
SL360-B01DC	6W	500lm	CCT3				

ROLAND II




IP65



Application

Home, Office, Shop, Hotel etc.

Finish optional

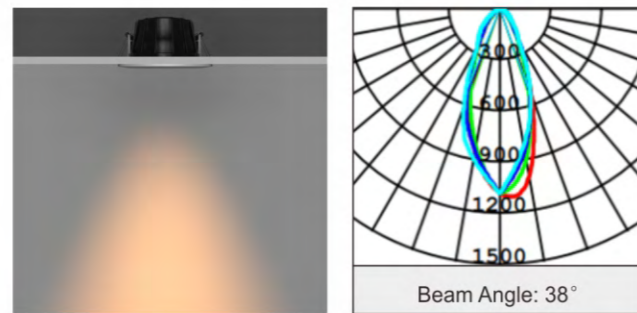


Features:

- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- CCT3 and dimming
- IP65 water-proof
- Separate isolated power supply connect lamp with connect terminal
- Tooling free installation
- Can be used as fire rated down light with a iron can cover

Water-proof

IP65 can be used into wet applications




360° Rotation

Can be adjusted angle from all directions



Insulation Cover


Can be covered by insulation directly

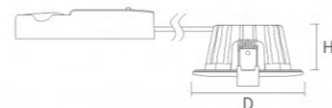

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A02	8.5W	720lm	3000K/4000K/6500K	38°	Black/White/Silver	φ78mm	φ96x40mm
SL360-B02	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ65mm	φ81x37mm



ROLAND IV

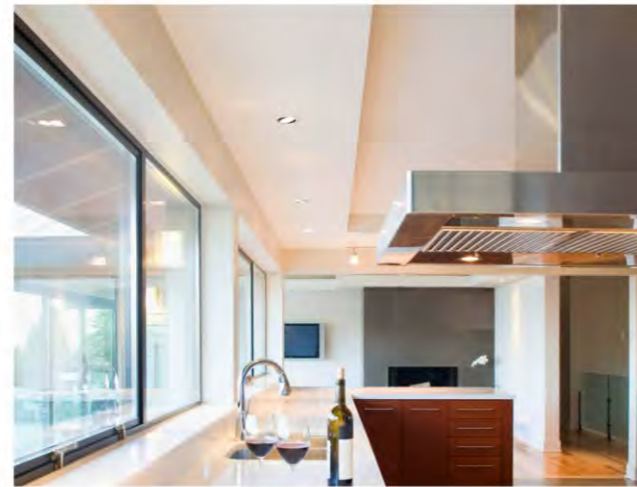

Application

Home, Office, Shop, Hotel etc.

Features:

- Separated isolated driver with built in terminal
- Male & female plug between driver and lamp

Water-proof

Front waterproof IP54



360° Rotation

360° angle adjusted from all directions



CCT3

CCT3 switch changeable on driver



Insulation Cover

Can be covered by insulation directly




Finish optional



Black




White

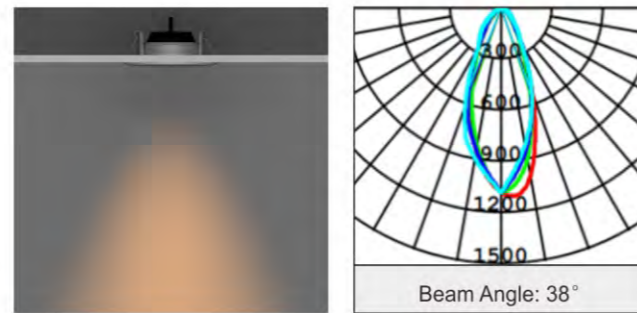

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-C01A	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ68mm	φ81x32mm
SL361-C02B	6W	500lm	CCT3	38°	Black/White/Silver	φ68mm	φ81x32mm

ROLAND V

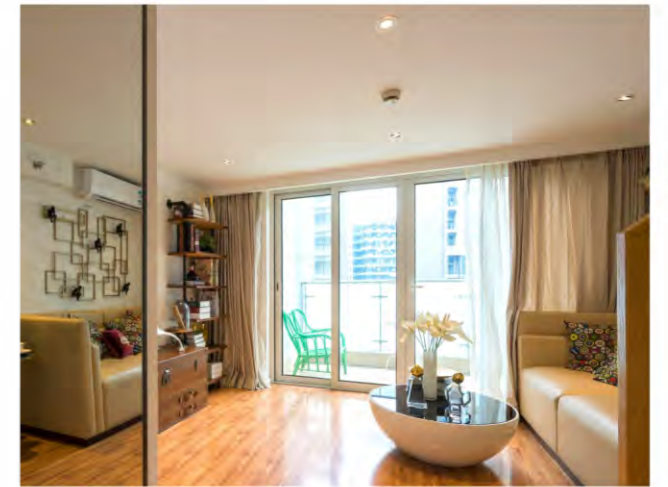

Application

Home, Office, Shop, Hotel etc.

Features:

- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Tooling free installation
- Can be used as fire rated down light with a iron can cover

Water-proof

Front waterproof IP54



360° Rotation

360° angle adjusted from all directions



Insulation Cover

Can be covered by insulation directly





Finish optional



Black



White

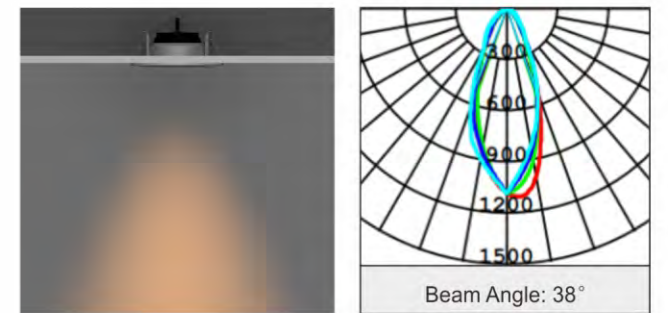

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-C02	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ68mm	φ81x32mm

FIRE RATED DOWN LIGHT

Fire resistance test : BS476-20 / BS476-21



Tool-free
3pin loop in and loop out



30/60/90 min anti-fire test



Front CCT3 Switch
2700K-6500K




IP65 Rate
Water proof rubber ring



Anti-glare design
Deep anti-glare

Accessories
Detachable trim bezels of 4 colors.

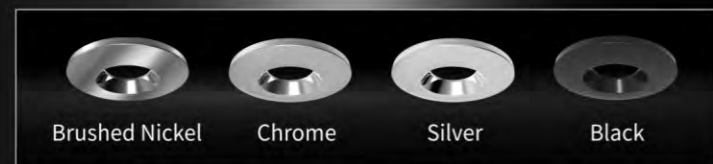

CLOVER II



Features:

- 30/60/90 min anti-fire test
- Up to 300mm height insulation coverable
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out

Fire-rated

Adopt flame retardant material, safe and secure



Tool-free

Tool-free design save the installation cost



CCT3

Front switch to change the CCT



Insulation Cover



Can be covered by insulation directly



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional:

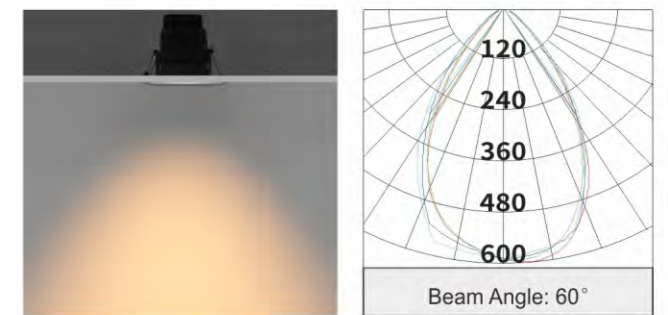

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-A02S	8.5W	600lm	3000K/4000K/6500K	60°	φ70mm	φ88x91mm
SL002-A02C	8.5W	600lm	CCT3			


CLOVER I



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional:

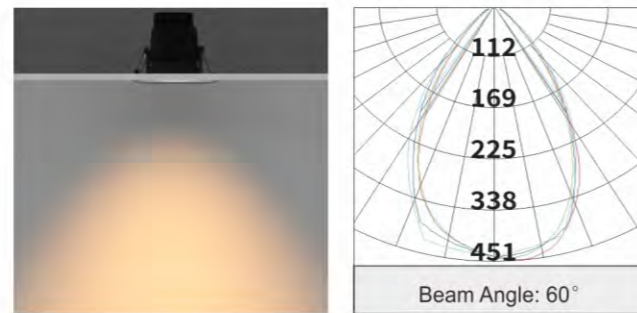

Features:

- 30/60/90 min anti-fire test
- Up to 300mm height insulation coverable
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out

Fire-rated

Adopt flame retardant material, safe and secure



Tool-free

Tool-free design save the installation cost




CCT3

Front switch to change the CCT




Insulation Cover

Can be covered by insulation directly



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-A01S	6.5W	500lm	3000K/4000K/6500K	60°	φ70mm	φ88x73mm
SL002-A01C	6.5W	500lm	CCT3			


CLOVER III

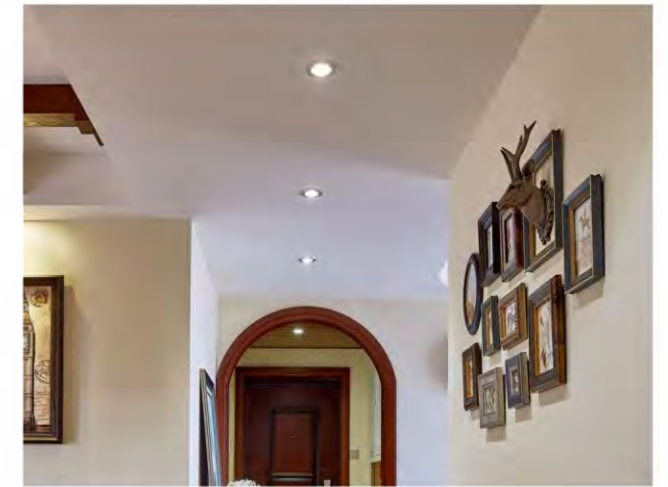

Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional:

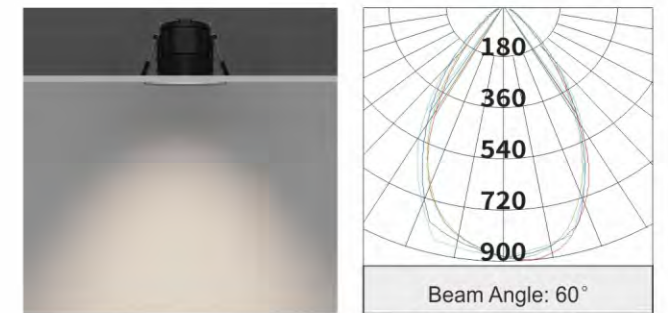

Features:

- 30/60/90 min anti-fire test
- Up to 300mm height insulation coverable
- CCT3 changeable optional
- 3pin loop in and loop out
- Separated isolated driver with built in terminal
- Male & female plug between driver and lamp
- Wifi version optional

Fire-rated

Adopt flame retardant material, safe and secure



Tool-free

Tool-free design save the installation cost




CCT3

Front switch to change the CCT



Insulation Cover

Can be covered by insulation directly

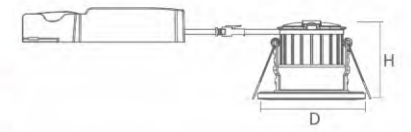

Model	Wattage	Lumen	CCT	LED Type	Beam	Cut hole	Dimensions
SL002-A03S	8.5W	600lm	3000K/4000K/6500K	COB	60°	φ70mm	φ88x65mm
SL002-A03C	8.5W	600lm	CCT3	SMD	60°	φ70mm	φ88x65mm

CLOVER IV




IP65



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional:

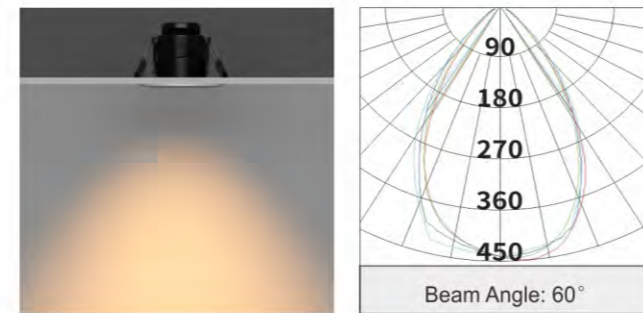

Features:

- 30/60/90 min anti-fire test
- Up to 300mm height insulation coverable
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out

Fire-rated

Adopt flame retardant material, safe and secure



Tool-free

Tool-free design save the installation cost




CCT3

Front switch to change the CCT



Insulation Cover

Can be covered by insulation directly



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-B01S	6W	480lm	3000K/4000K/6500K	60°	φ68mm	φ88x64mm
SL002-B01C	6W	480lm	CCT3			

CLOVER V




IP65



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional:

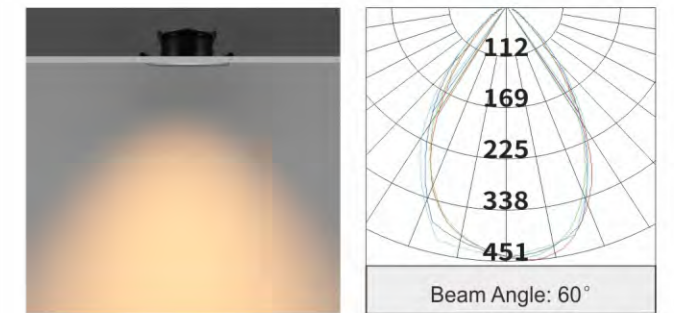

Features:

- 30/60/90 min anti-fire test
- Up to 300mm height insulation coverable
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out
- Wifi function available
- Low profile design, good for narrow space



Fire-rated

Adopt flame retardant material, safe and secure



CCT3

Front switch to change the CCT




Insulation Cover

Can be covered by insulation directly



Tool-free

Tool-free design save the installation cost



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-C01S	6W	520lm	3000K/4000K/6500K	60°	φ68mm	φ88x40mm
SL002-C01C	6W	480lm	CCT3			

ROLAND III



Features:

- 30/60/90 min anti-fire test
- CCT3 and dimming
- Tooling free installation
- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Can be used as fire rated down light with a iron can cover



Application

Home, Office, Shop, Hotel etc.

Finish optional



Fire-rated

Adopt flame retardant material, safe and secure



360° Rotation

Can be adjusted angle from all directions





CCT3

CCT3 switch changeable on driver



Iron Can

Be covered directly by insulation material

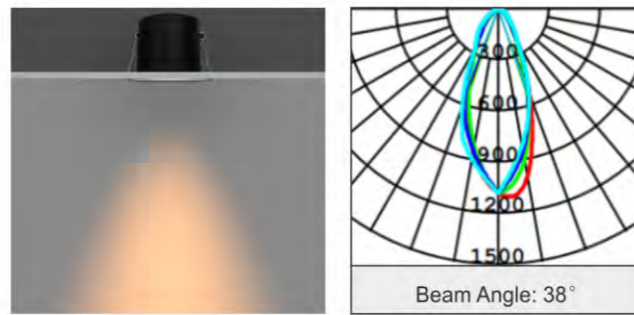


Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A03FC	8.5W	720lm	CCT3	38°	Black/White/Silver	φ80mm	φ96x63mm
SL360-A03FS	8.5W	720lm	3000K/4000K/6500K	38°	Black/White/Silver	φ80mm	φ96x63mm
SL360-B03FC	6W	500lm	CCT3	38°	Black/White/Silver	φ68mm	φ81x63mm
SL360-B03FS	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ68mm	φ81x63mm

CLOVER V



Features:

- 30/60/90 min anti-fire test
- CCT3 and dimming
- Tooling free installation
- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Can be used as fire rated down light with a iron can cover

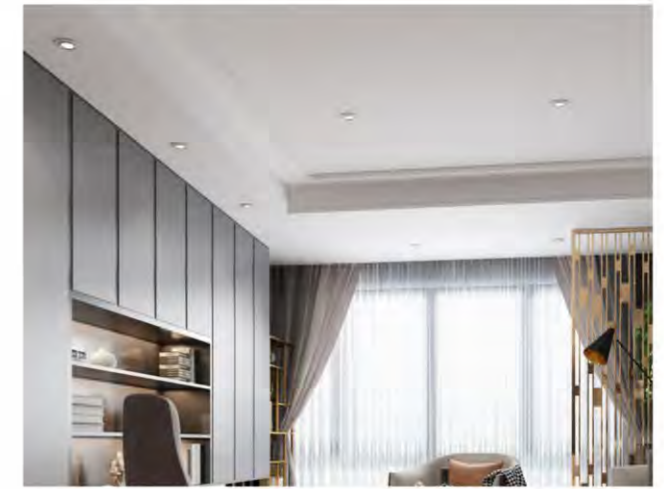

Application

Home, Office, Shop, Hotel etc.

Finish optional



Fire-rated

Adopt flame retardant material, safe and secure



360° Rotation

Can be adjusted angle from all directions






CCT3

CCT3 switch changeable on driver



Iron Can

Be covered directly by insulation material

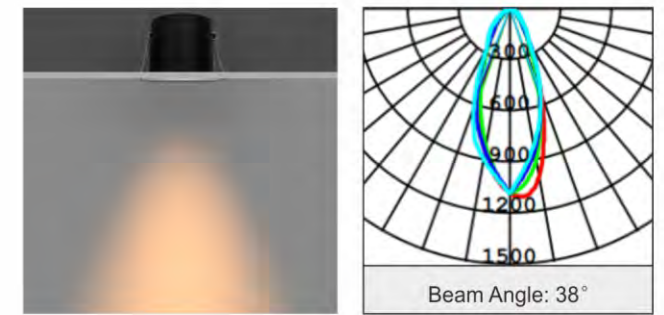

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-A03FC	6W	500lm	CCT3	38°	Black/White/Silver	φ68mm	φ81x63mm
SL361-A03FS	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ68mm	φ81x63mm

MIRANDA

COREIN



Application

Home, Office, Shop, Hotel etc.

Color of Reflector optional:



Features:

- Deep recessed and anti-glare
- Die-casting housing, good heat dissipation
- Dimming and IP65 / IP44 optional

Water-proof

Front waterproof IP44/IP65 available




Fast connecting terminal

2pin loop in and loop out




Extra Frame

Can be covered directly by the insulation

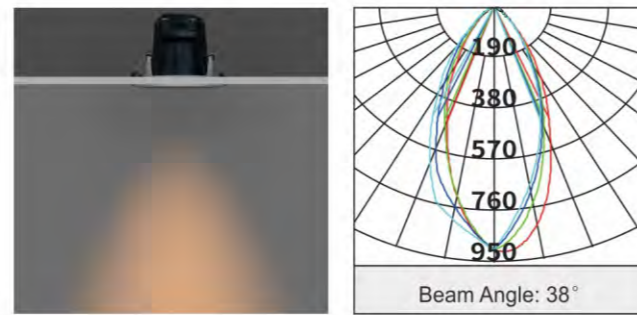

Model	Wattage	Lumen	CCT	Beam	Type	IP Rate	Cut hole	Dimensions
SL015-W044	9W	700lm	3000K/4000K/6500K	38°	Adjustable	IP44	φ70mm	φ86x62mm
SL015-N044	9W	650lm	3000K/4000K/6500K	38°	Adjustable	IP44	φ70mm	φ86x62mm
SL015-W065	9W	700lm	3000K/4000K/6500K	38°	Fixed	IP65	φ70mm	φ86x62mm
SL015-N065	9W	650lm	3000K/4000K/6500K	38°	Fixed	IP65	φ70mm	φ86x62mm

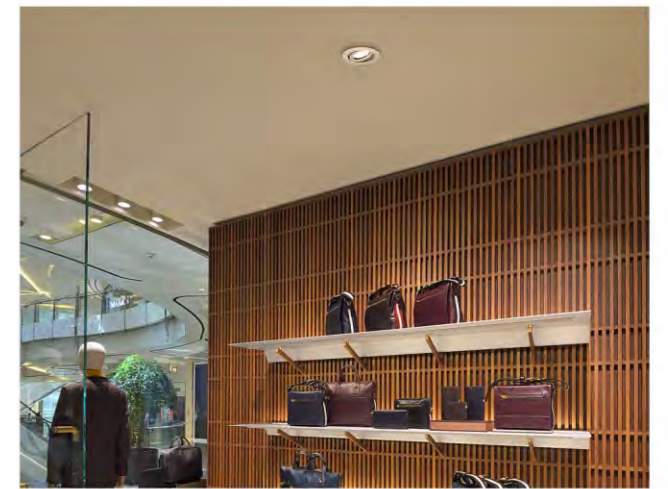

Application

Home, Office, Shop, Hotel etc.

Frame optional



Features:

- Module design, die-casting housing
- Isolated driver
- White and black optional
- Beam angle 24°, 36° for choosing
- Model 650lm can be covered
- Fixed and adjustable available
- 90-100lm/w, 5 years warranty



IP Class

IP44 of adjustable and IP65 of fixed from front.





Die-casting

Die-casting heat sink, heat fast



Insulation Cover

Model 650lm Can be covered by insulation directly

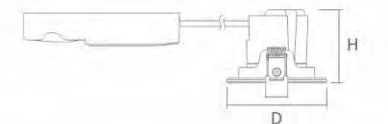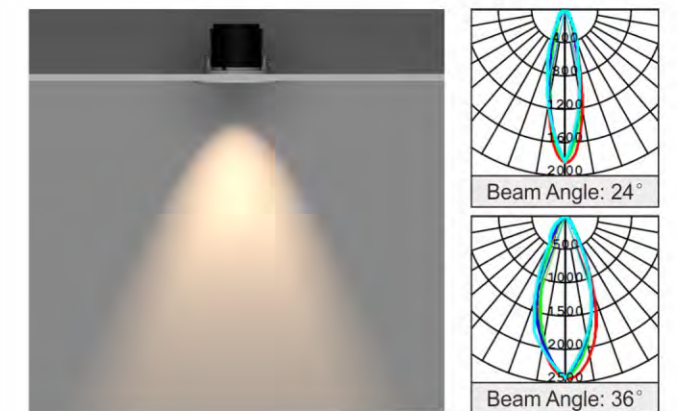

Model	Wattage	Lumen	CCT	Beam	Type	Cut hole	Dimensions
SL005-A	7.5W	650lm	3000K/4000K/6500K	24°/36°	Fixed/Adjustable	φ68mm	φ85x62mm
SL005-B	10.5W	900lm	3000K/4000K/6500K	24°/36°	Fixed/Adjustable	φ68mm	φ85x62mm
SL005-C	13.5W	1200lm	3000K/4000K/6500K	36°	Fixed/Adjustable	φ68mm	φ85x62mm

MODULE

Module & Accessories Combination



Frame

Fixture ring

GU10 base with junction box

GU10 & MODULE



Model	Wattage	Lumen	CCT	Beam	Dimensions
SL003-A01S	6W	500lm	3000K/4000K	100°	φ50x43mm
SL003-A02S	6W	450lm	3000K/4000K	38°	φ50x43mm
SL003-A02C	6W	450lm	CCT3		



Model	Wattage	Lumen	CCT	Beam	Dimensions
SL003-B01S	6W	500lm	3000K/4000K	100°	φ50x53mm
SL003-B02S	6W	450lm	3000K/4000K	38°	φ50x53mm
SL003-B02C	6W	450lm	CCT3		



Model	Wattage	Lumen	CCT	Beam	Dimensions
SL003-GU10A01	5.5W	345lm	3000K/4000K	38°	φ50x54mm
SL003-GU10A02					

GECO



Application

Restaurant, coffee shop, bar, home, office, shops, hotel etc.


This product works well with the below popular fixtures in Euro market.



The affordable LED spot solution

Features:

- Cob-like lens , more elegant looking
- Compatible with **Leading edge** and **trailing edge** dimmers
- Comply with ERP 2019/2020 and **new EMC** standard in 2022
- Dim and non dim optional
- Up to **100lm/W**@4000K version
- 2 years warranty




Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimming	Dimensions
SL003-GU10B01	4.8W	450lm-500lm	2700K/3000K/4000K	38°	IP20	Non Dim	φ50x53.8mm
SL003-GU10B02	5.5W	500lm-560lm	2700K/3000K/4000K			Triac Dim	



DECO SPOT LIGHT

Modular design

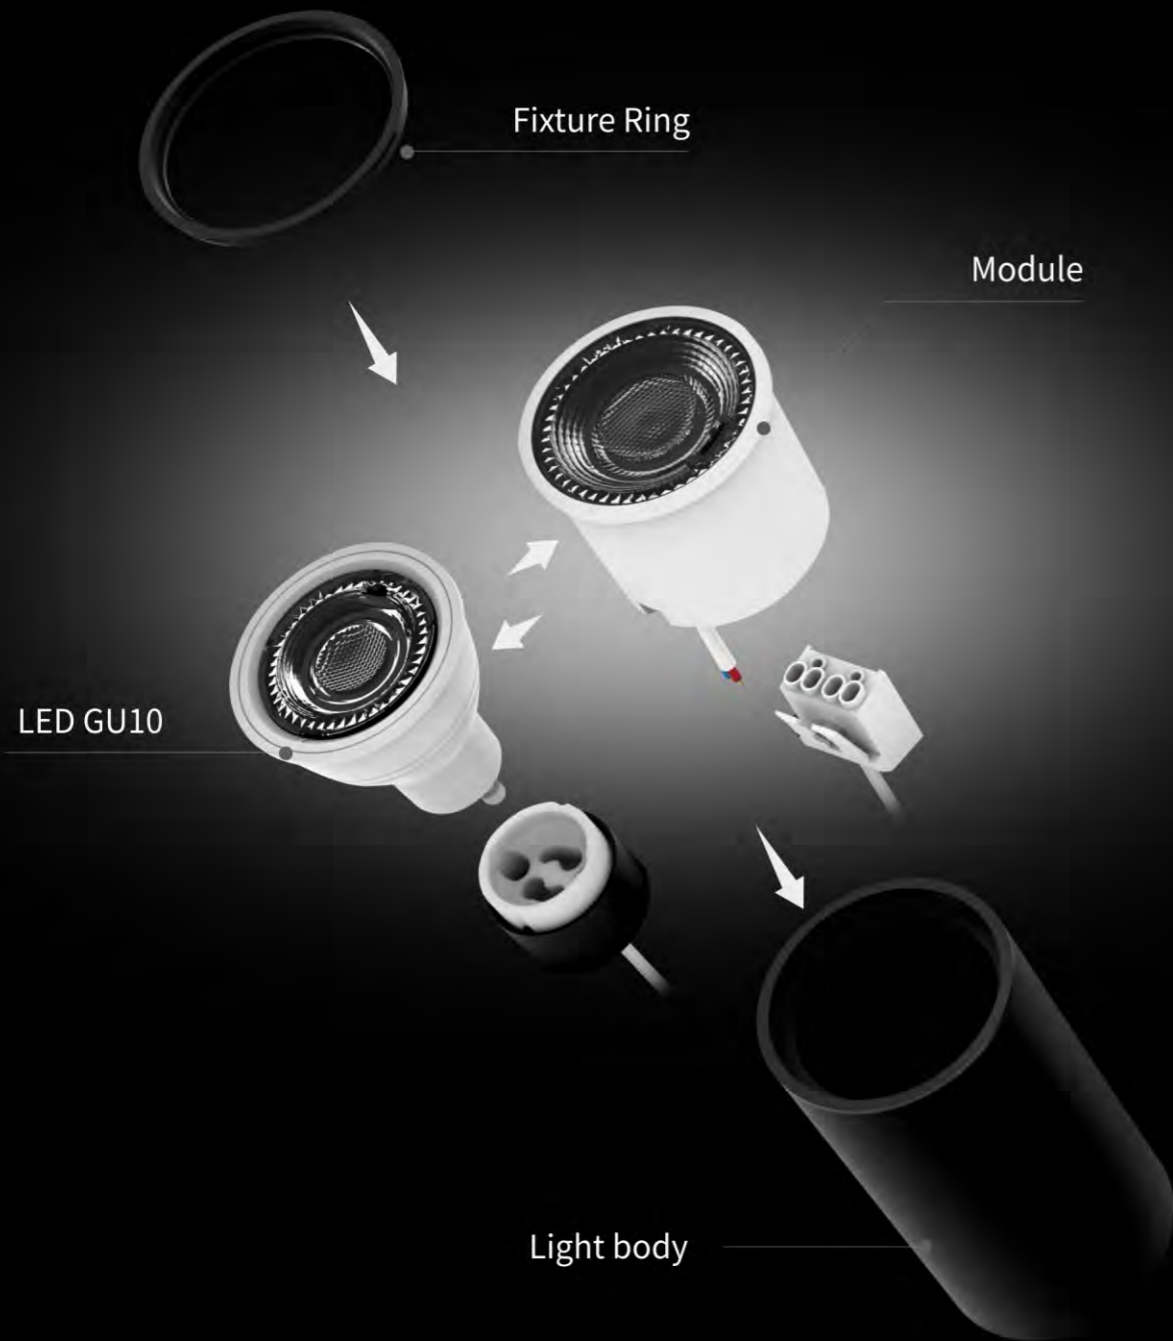

PEGGY



SP001-A03B




SP001-A01B



SP001-A02B




SP001-A04B

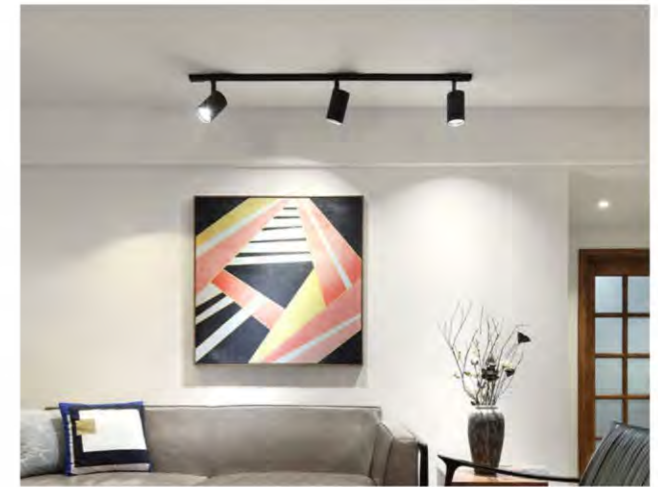

Application

Home, Office, Shop, Hotel etc.

Line Art

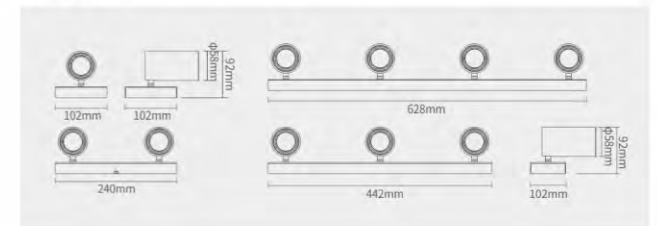

Features:

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable


350° Rotatable

Vertically tilt 90°, horizontally rotate 350°



Light Source Optional

Can be used with GU10 or module



Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP001-A01B	1x5W	450lm	3000K/4000K	38°	GU10/ Module	$\phi 58 \times 102 \times 92\text{mm}$
SP001-A02B	2x5W	900lm				$\phi 58 \times 240 \times 92\text{mm}$
SP001-A03B	3x5W	1350lm				$\phi 58 \times 442 \times 92\text{mm}$
SP001-A04B	4x5W	1800lm				$\phi 58 \times 628 \times 92\text{mm}$

GEORGE



SP001-B03B



SP001-B01B



SP001-B02B




SP001-B04B



Application

Home, Office, Shop, Hotel etc.

Line Art

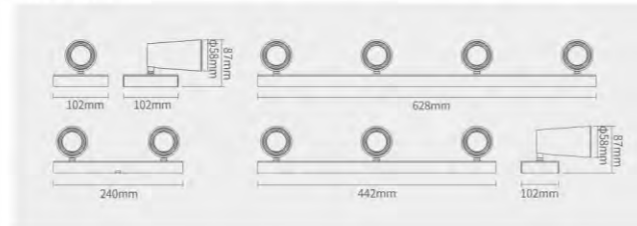

Features:

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable

350° Rotatable

Vertically tilt 90°, horizontally rotate 350°



Light Source Optional

Can be used with GU10 or module



Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP001-B01B	1x5W	450lm	3000K/4000K/6500K	38°	GU10/ Module	φ58x102x87mm
SP001-B02B	2x5W	900lm				φ58x240x87mm
SP001-B03B	3x5W	1350lm				φ58x442x87mm
SP001-B04B	4x5W	1800lm				φ58x628x87mm

PEDRO



SP001-C03B



SP001-C01B



SP001-C02B




SP001-C04B



Application

Home, Office, Shop, Hotel etc.

Line Art

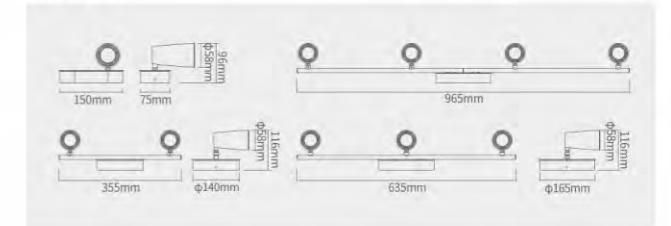

Features:

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable


350° Rotatable

Vertically tilt 90°, horizontally rotate 350°



Light Source Optional

Can be used with GU10 or module



Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP001-C01B	1x5W	450lm	3000K/4000K/6500K	38°	GU10/ Module	φ58x150x96mm
SP001-C02B	2x5W	900lm				φ58x355x116mm
SP001-C03B	3x5W	1350lm				φ58x635x116mm
SP001-C04B	4x5W	1800lm				φ58x965x116mm

EMILY



SP001-D03B




SP001-D01B



Application

Home, Office, Shop, Hotel etc.

Line Art

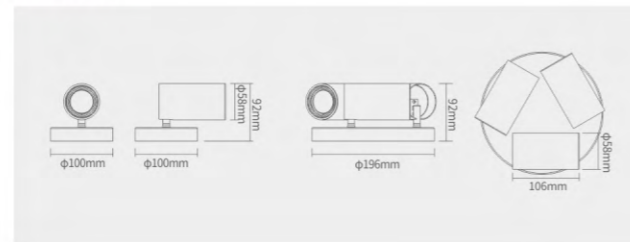

Features:

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable

350° Rotatable

Vertically tilt 90°, horizontally rotate 350°




Light Source Optional

Can be used with GU10 or module



Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP003-D01B	1x5W	400lm	3000K/4000K/6500K	38°	GU10/ Module	φ58xφ100x92mm
SP003-D03B	3x5W	1200lm				φ58xφ196x92mm

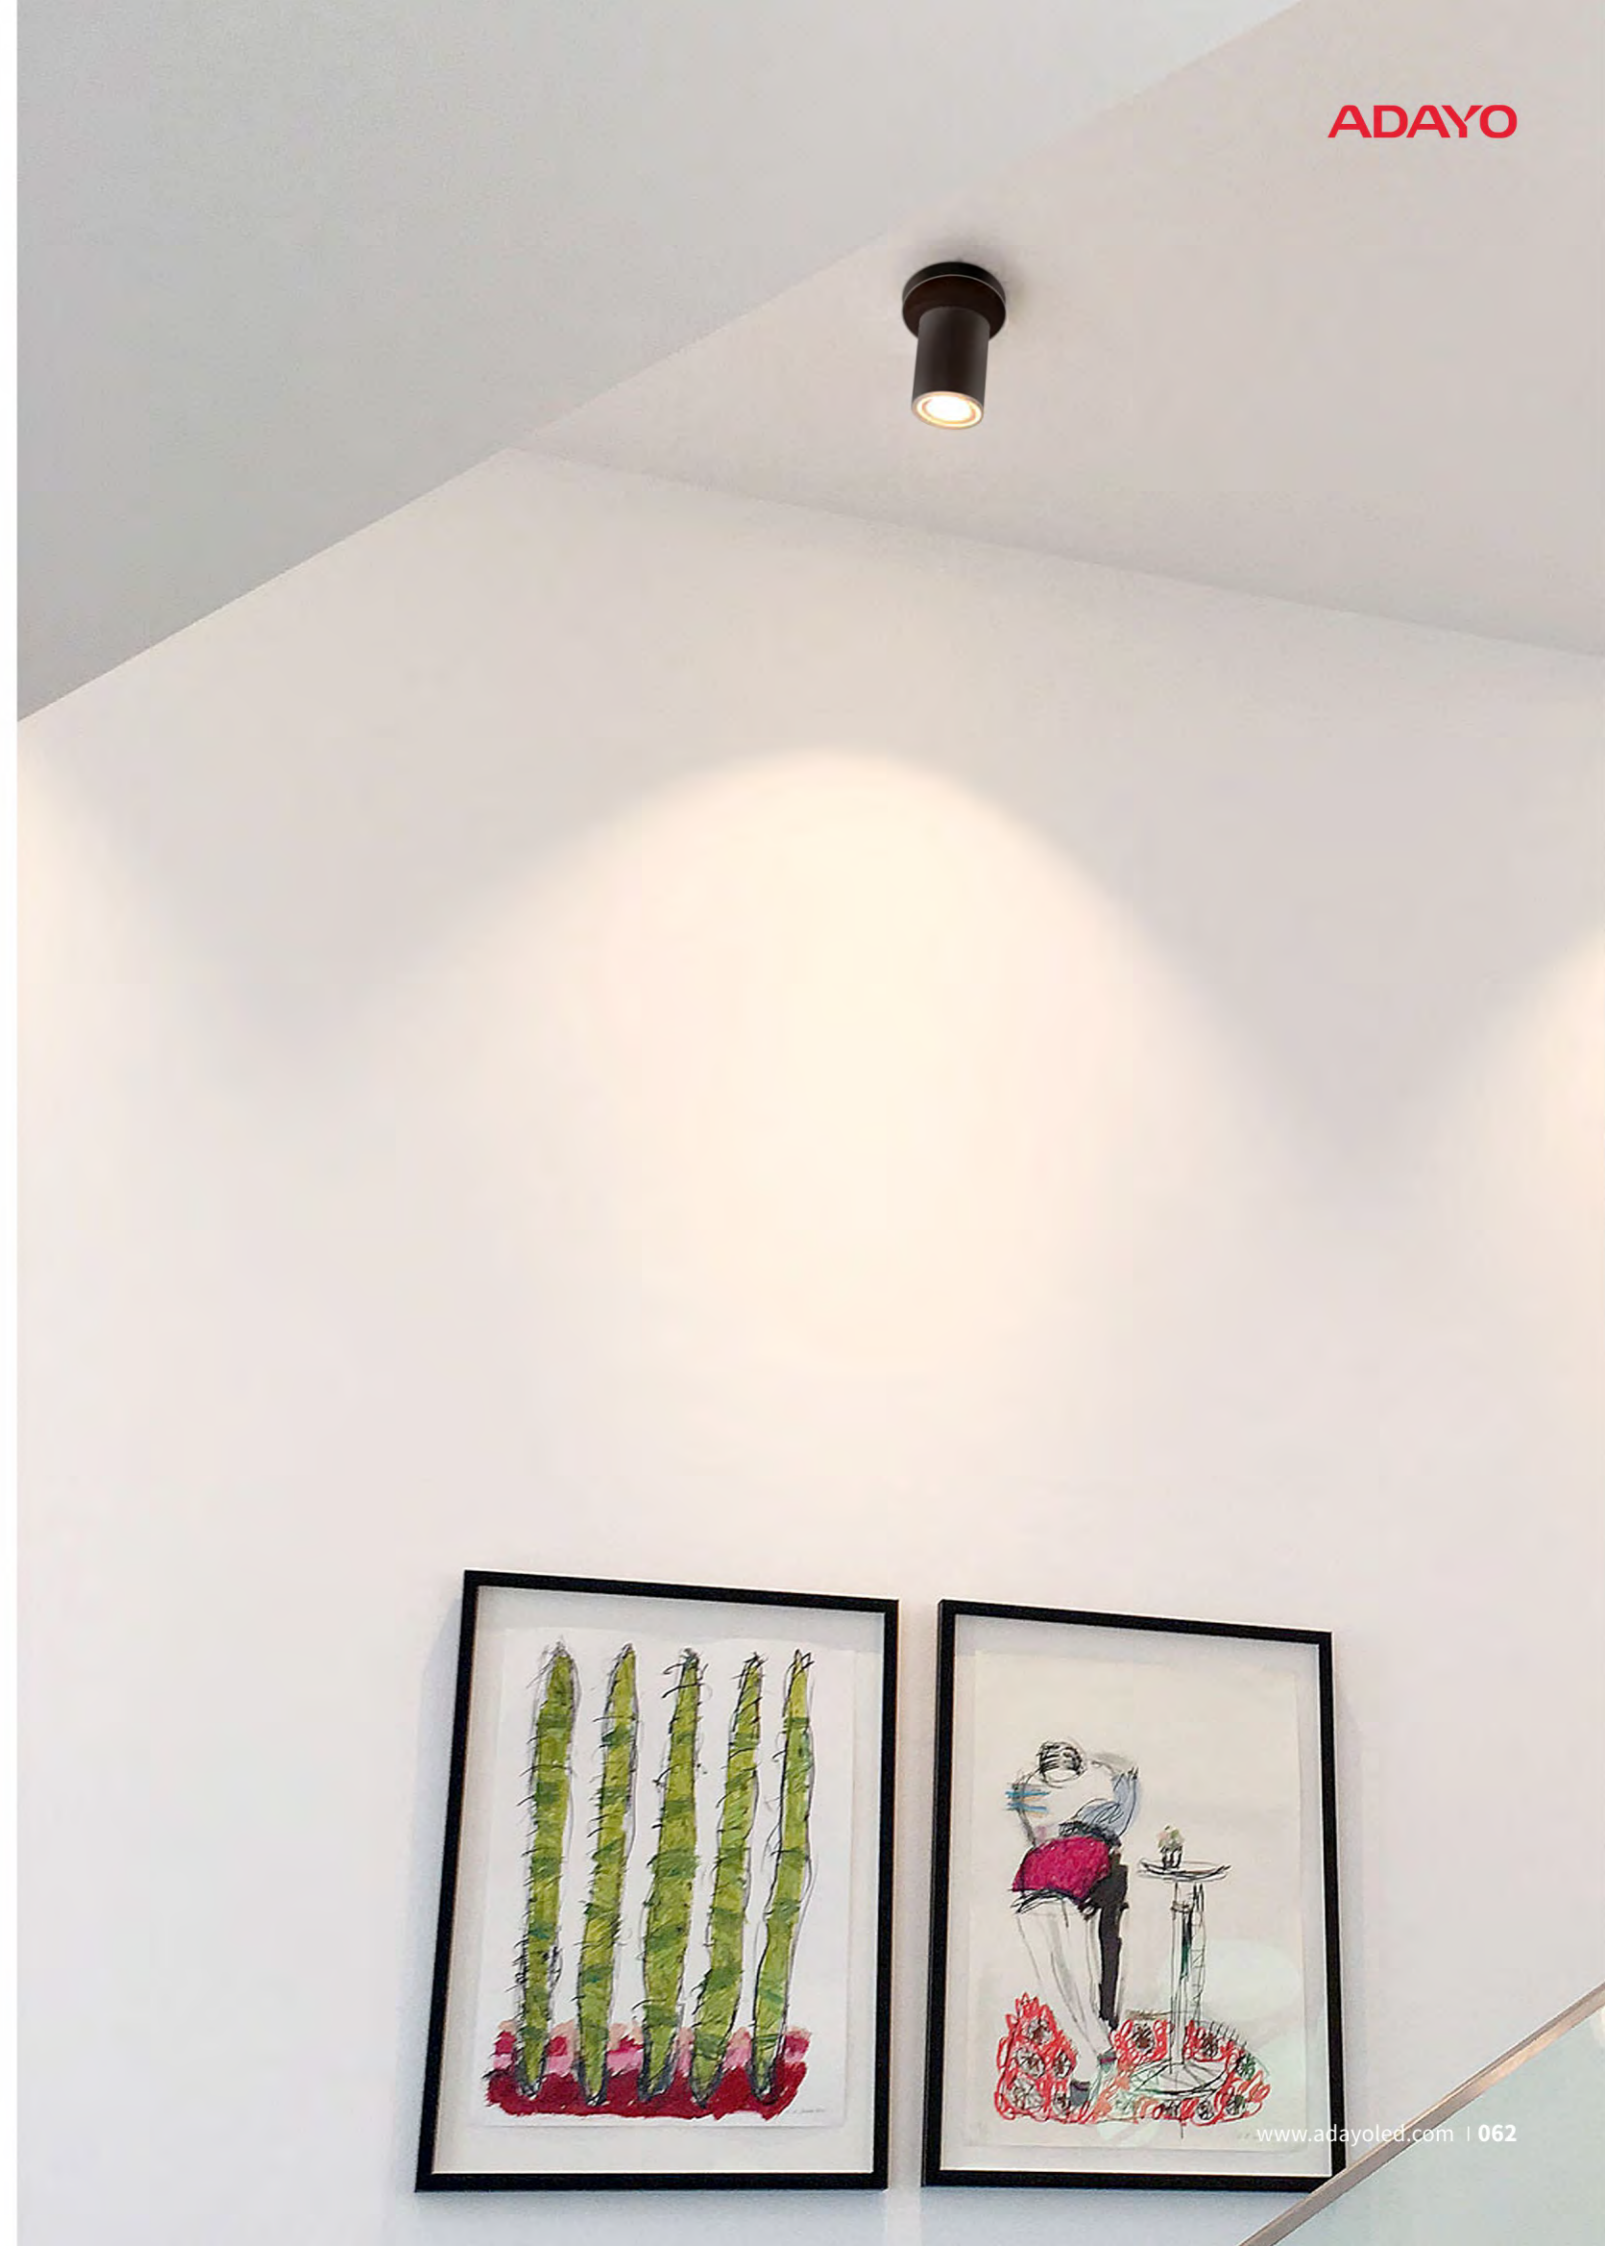

DECO SPOT LIGHT - BOX



GU10



BOX



SP001-E01W



SP001-E02W



SP001-E04W



SP001-E01B



SP001-E02B




SP001-E04B



Application


Home, Office, Shop, Hotel etc.

Line Art

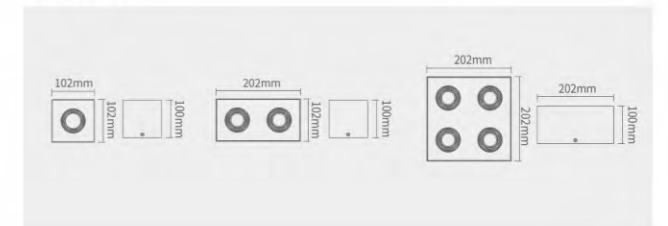

Features:

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 36° tiltable



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
SP001-E01W	1x5W	450lm				102x102x100mm
SP001-E02W	2x5W	900lm	3000K/4000K	38°	White / Black	202x102x100mm
SP001-E04W	4x5W	1800lm				202x202x100mm

DENNIE



IP65



Application

Home, Office, Shop, Hotel etc.

Features:

- Surface-mounted and pendant design
- Lens and reflector optional
- Water-proof IP65 can be used in wet application
- White and black body optional
- Full range size and wattage

Color of Reflector optional:



Water-proof

Front waterproof IP65





2 Installations

Surface-mounted & Pendant



Anti-glare

UGR < 22, Shielding angle 40°



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
SP002-10W	10W	850lm	3000K/4000K	38°	Black/White	φ75x100mm
SP002-15W	15W	1300lm				φ75x100mm
SP002-20W	20W	1700lm				φ95x152mm
SP002-30W	30W	2500lm				φ115x152mm
SP002-50W	50W	5000lm				φ140x162mm



MINI EYES



Application

Wardrobe, Cupboard, Bookcase, Cabinet , Indoor space.

Features:

- Die-casting aluminum body, good heat dissipation
- Small size for narrow space



Small Size

The 25mm mini size is suitable for a more narrow space



Aluminum Body

Die-casting aluminum body, good heat dissipation



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL004-A1	1W	70lm	3000K/6500K	38°	φ28mm	φ38x25mm

MINI EYES



Features:

- Die-casting aluminum body, good heat dissipation
- Small size for narrow space
- 12pcs with a junction box and one driver
- RF remote control dimming and group setting

Application

Bathroom Cabinet, Kitchen, Balcony, Canopy etc.

Accessories




Driver & Junction box



RF remote control dimming

Water-proof

Front waterproof IP65 available



Aluminum Body

Die-casting aluminum body, good heat dissipation




Remote Control

Dimming and group setting



Line Art

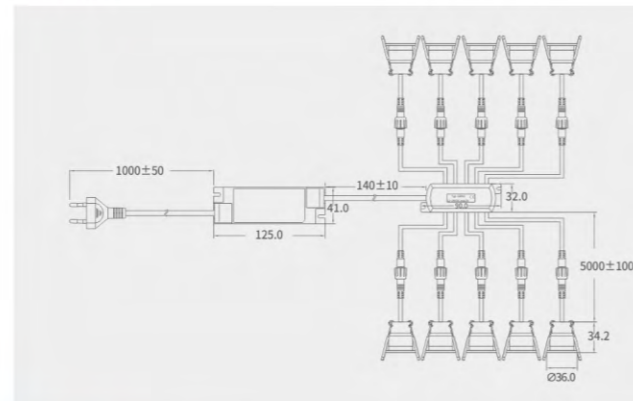


Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL004-A3	3W	210lm	3000K/6500K	38°	φ28mm	φ36x34mm



LED DOWN LIGHT

■ Flat Down Light

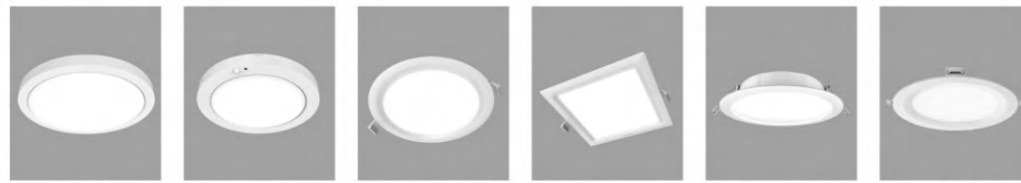

PDL001-606D 077 PDL001-M01 075 DL001-075R 077 DL001-075S 077 DL007-A01D 078 DL008-06 079

■ Deep Recessed Down Light



DL060-8 081 DL005-B6S 082 DL003-01B10D (Black) 083 DL003-01B10D (White) 083 DL003-02W10 (White) 084 DL003-02W10 (Black) 084

■ Ceiling Light



CL003-W11 085 DL005-B6S 086 CL002-300 088


■ Cabinet Light



CL001-A 089 CL001-B 089



MULTI-FIT FLAT DOWN LIGHT

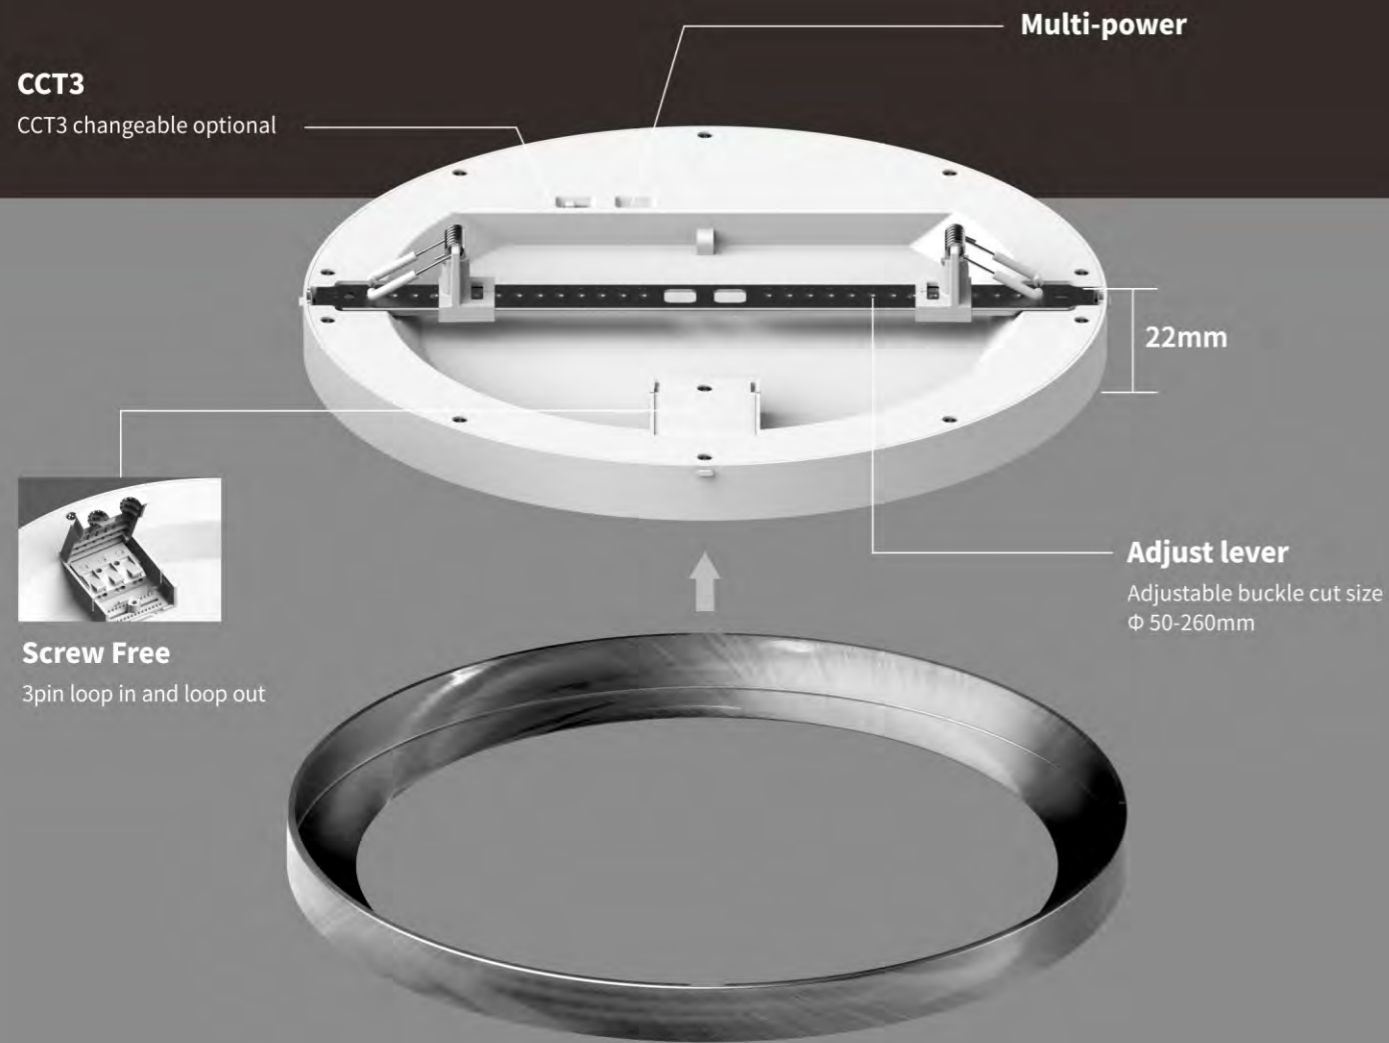

Bezels optional:
Detachable trim bezels of 4 colors.



PIZZA



Application

Corridor, Aisle, Circulation area

Color of Bezels optional:




Features:

- Adjustable buckle cut size Φ 50-260mm
- CCT3 switch on the back
- Dimming, non-dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm

Cut Out

For ϕ 50mm- ϕ 260mm cut hole




Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



CCT3 & Multi-power

CCT3 & Multi-power changeable switch on back





Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
PDL001-606D	6W	480lm	CCT3	110°	ϕ 50-125mm	ϕ 165x22mm
PDL001-612D	12W	960lm			ϕ 50-125mm	ϕ 165x22mm
PDL001-818D	18W	1620lm			ϕ 65-185mm	ϕ 217x22mm
PDL001-1121D	21W	1900lm			ϕ 65-260mm	ϕ 290x22mm
PDL001-1123D	23W	2100lm			ϕ 65-260mm	ϕ 290x22mm

PIZZA SENSOR



Application

Corridor, Aisle, Circulation area

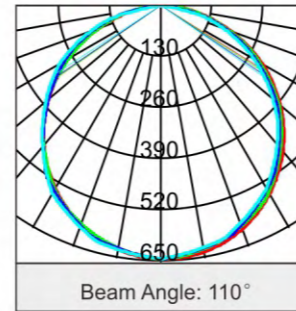

Features:

- Adjustable buckle cut size Φ 50-255mm
- CCT3 and multi-power optional
- PIR infrared sensor, you can set the off time 5s/30s/60s/180s after leaving


Cut Out

For ϕ 50mm- ϕ 255mm cut hole




Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



PIR infrared Sensor

Can set light off time 5s/30s/60s/180s after leaving



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
PDL001-M01	9W-18W	720lm-1620lm	CCT3	110°	ϕ 65-180mm	ϕ 217x22mm




CREPE



Application

Home, Office, Shop, Hotel etc.

Line Art

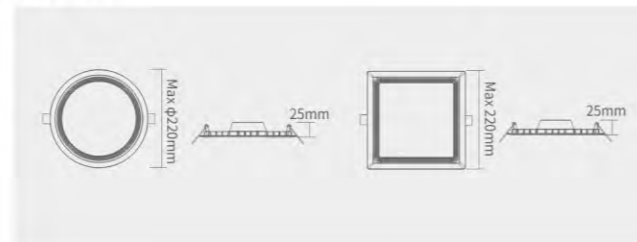

Features:

- Integrated slim design
- No flicker, comfortable and natural light
- Intelligent driver with short-circuit protection, improve safety performance
- High-quality springs with plastic protective sleeves, ensure installation convenient and safe


Built-in driver

Easy installation



Ultra-slim

Ultra-slim design for narrow space



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL001-075R	3W	200lm	3000K/4000K/6500K	110°	φ75mm	φ93x25mm
DL001-100R	6W	350lm			φ100mm	φ118x25mm
DL001-125R	9W	700lm			φ125mm	φ143x25mm
DL001-150R	12W	900lm			φ150mm	φ168x25mm
DL001-220R	18W	1600lm			φ200mm	φ220x47mm
DL001-075S	3W	200lm	3000K/4000K/6500K	110°	75x75mm	93x47mm
DL001-100S	6W	350lm			100x100mm	118x47mm
DL001-125S	9W	700lm			125x125mm	143x47mm
DL001-150S	12W	900lm			150x150mm	168x47mm
DL001-220S	18W	1600lm			200x200mm	220x47mm

CAKE



Application

Home, Office, Shop, Hotel etc.

Features:

- Metal slim body height 38mm
- External isolated driver
- Excellent dimming performance




IP44 Design

IP44 from front




Metal Housing

One piece stamped metal housing



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL007-A01D	7W	570lm	2700K/3000K/4000K	100°	φ90mm	φ112x37mm
DL007-A02D	12W	920lm			φ120mm	φ146x38mm
DL007-A03D	15W	1200lm			φ150mm	φ180x38mm
DL007-A04D	25W	2100lm			φ200mm	φ235x38mm



ROLL



IP54



Application


Home, Office, Shop, Hotel etc.

Features:

- Power changeable 8W-14W-28W / 14W-20W-25W
- Constant current power supply, high luminous efficiency 100lm/W
- CCT3 is available
- 2pin loop in and loop out screw-free installation
- Wide-sided design is suitable for 140-200mm cut installations

Water-proof

Front waterproof IP54





Screw free

Screw free design save the installation cost



CCT3 & Multi-power

CCT3 & Multi-power changeable switch on back



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL008-06	8W-14W-18W	800lm-1400lm-1800lm	CCT3	110°	φ140-200mm	φ215x50mm
DL008-08	14W-20W-25W	1400lm-2000lm-2600lm	CCT3	110°	φ200-260mm	φ275x50mm




MAGIC HAT



Application

Mall, Hall, Meeting Room, Hotel etc.

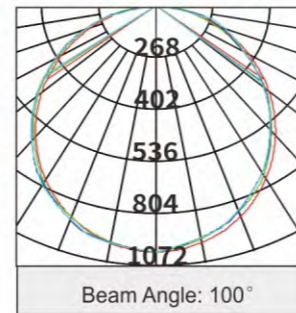

Features:

- Anti-glare. UGR<22
- Integrated design, easy to install
- Good heat dissipation performance

Heat Sink

Good heat dissipation performance



Fast connecting terminal

Loop in and loop out



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL060-6	12W	1000lm	2700K/4000K/6500K	100°	φ150mm	φ173x98mm
DL060-8	21W	2100lm	2700K/4000K/6500K	100°	φ206mm	φ233x106mm

DE GAULLIST





IP44



Application

Office, Shopping Mall, Hotel, Airport etc.



Features:

- Anti-glare. UGR<14
- Integrated design, easy to install
- Multi-power and CCT3 optional
- 5 years warranty


Reflector Optional

Changeable reflector




CCT3

CCT3 changeable switch on back



Model	Wattage	Lumen	CCT	UGR	Beam	Cut hole	Dimensions
DL005-W6S			2700K/4000K/6500K	19	60°		
DL005-W6C	13W	1300lm	CCT3	19	60°	φ150mm	φ175x110mm
DL005-W6S-14			2700K/4000K/6500K	14	38°		
DL005-B8S			2700K/4000K/6500K	19	60°		
DL005-B8C	15W/25W	1500lm/2500lm	CCT3	19	60°	φ200mm	φ220x140mm
DL005-B8S-14	35W	3500lm	2700K/4000K/6500K	14	38°		

BLACK SWAN

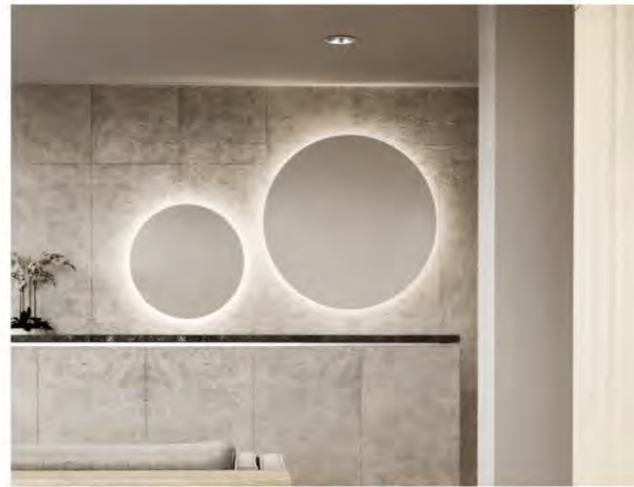

Application

Home, Office, Shop, Hotel etc.

Color of Reflector optional:



Features:



- Die-casting body, COB light
- Beam angle 15°, 24°, 38°, 55° optional
- White and black color body for choosing
- Black, white, mirror, silver color reflector optional

Die-casting

Die-casting body, good heat dissipation performance





Optical Accessories

2 optional accessories: Lens and reflector



Beam Angle

4 different angles for different scenes.



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
DL003-01B10D	10W	900lm				φ70mm	φ86x55mm
DL003-01B18D	18W	1800lm	3000K/4000K/5000K	15°/24°/38°/55°	Black/White	φ85mm	φ101x60mm
DL003-01B30D	30W	2800lm				φ120mm	φ140x73mm

WHITE SWAN



Application

Home, Office, Shop, Hotel etc.

Color of Reflector optional:



Features:



- Die-casting body, COB light
- Beam angle 45°, IP54
- White and black color body for choosing
- Black, white, mirror, silver color reflector optional

Water-proof

Front waterproof IP54




LED COB

Adopt COB light source, light spot is soft and uniform, long life



2 Colors

White and black color body for choosing



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL003-02W10	10W	900lm			φ90mm	φ100x75mm
DL003-02W20	20W	1800lm	3000K/4000K/5000K	45°	φ130mm	φ140x90mm
DL003-02W30	30W	2700lm			φ170mm	φ186x112mm

CD MIRROR



Surface-mounted



Pendant (with long pole)



Pendant (with metal wire)




Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features:

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- 5 years warranty



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL003-D11	15W	1500lm				φ300x80mm
CL003-D15	25W	2000lm	3000K/4000K/5000K	100lm/W	120°	φ480x80mm
CL003-D24	50W	4000lm				φ600x80mm

CD MIRROR



White



Black



Application


Home, Office, Shop, Hotel etc.

Features:

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- UGR 19
- 5 years warranty




Ultra-slim

Ultra-slim design for narrow space



2 installations

Surface-mounted and pendant



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
CL004-D12	15W	1500lm				φ300x551mm
CL004-D16	25W	2000lm	3000K/4000K/5000K	120°	Black/White	φ480x551mm
CL004-D24	40W	4000lm				φ600x551mm

ADELINE



Application

Bedroom, Livingroom, Corridor, Aisle, Circulation area



Wood



White+Wood




White



Black

Features:

- Plastic frame with wood, white and black finishing. Unique colors clashing design is available
- PMMA diffuser, light transmittance is up to 80%
- Switch CCT 2700K - 4000K - 6500K
- 25000 hours lifespan, high lighting efficiency 90lm/w
- CE, RoHs and new ERP 2019/2015 compliant
- WiFi function is optional



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL002-300	21W	1900lm	2700K/4000K/6500K	90lm/W	100°	φ300x50mm
CL002-450	28W	2800lm	2700K/4000K/6500K	100lm/W	100°	φ450x60mm

BAGEL




Application

Wardrobe, Cupboard, Bookcase, Cabinet.

Accessories



Line Art

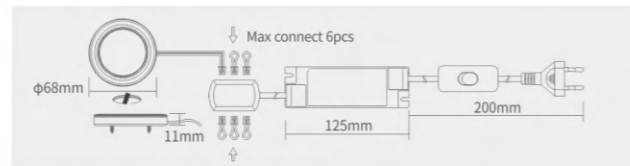

Features:

- Slim body, 24mm height
- Constant current output
- 6pcs with a junction box and one driver
- White and brushed nickel color optional
- Easy wiring and installing

Ultra-slim

Ultra-slim design for narrow space



2 Installations

2 installation: Recessed and surface-mounted



External Drive

6pcs with a junction box and one driver



Model	Wattage	Lumen	CCT	Beam	Finish	Installation	Cut hole	Dimensions
CL001-A	2.5W	190lm	3000K	100°	White/Brushed Nickel	Recessed	φ63mm	φ68x11mm
CL001-B	2.5W	190lm	3000K	100°	White/Brushed Nickel	Surface-mounted	/	φ68x11mm

