

ADAYO

2022-2023 CATALOGUE

OEM&ODM
MANUFACTURER
FOR LED LIGHTING

ADAYO

T : +86-752-5300 980
+86-752-5300 978
+86-752-5300 977
+86-752-5300 801
F : +86-752-5300 098
E : info@adayoled.com
A : Foryou Industrial Park Area B,
No.1 North Shangxia Road,
Dongjiang Hi-tech Industry Park,
Huizhou, Guangdong Province, P.R China
**HUIZHOU FORYOU OPTOELECTRONICS
TECHNOLOGY CO., LTD.**



adayo-led



adayo-led

www.adayoled.com

INDEX

■ COMMERCIAL

LED Spotlight

ROLAND	360° Rotatable recessed spotlight	011 - 014
JAMES	360° ECO Rotatable recessed spotlight	015 - 016
COREIN	Module recessed spotlight	017 - 020
MIRANDA	Deep recessed spotlight G1.5	021 - 022
MINI EYES	Mini recessed spotlight	023 - 026
GU10 SPOT	GU10 spotlight	027 - 028

LED Downlight

PIZZA	Multi-fit downlight	033 - 038
CAKE	Metal slim downlight	039 - 040
EIFFEL	Module downlight	041 - 049
DE GAULLIST	Deep recessed downlight UGR19	050 - 050
MAGIC HAT	Deep recessed downlight UGR22	051 - 052
CLOVER/ROLAND	Fire-rated downlight	053 - 058

■ RESIDENTIAL

LED Spotlight

AMBER	DIY slim recessed spot light	064 - 064
ROSEY	Metal slim recessed spot light	065 - 066
SOFIA	DIY G3 recessed spot light	067 - 067
AVALOR	DIY G4 recessed spot light	068 - 069
CLIO	DIY high power recessed spot light	070 - 070
PEGGY/EMILY/BOX	Surface mounted spot light	071 - 076
MODULE	Module & fixture	077 - 078
GEKO	GU10	079 - 080

LED Downlight

FLYING	Backlit downlight	085 - 085
CREPE	Sidelit downlight	086 - 086
BAGEL	Cabinet light	087 - 088

■ LED CEILING AND WALL LIGHT

BEN / ADELINE / MUFFIN/CD MIRROR	LED Ceiling light	090 - 098
---	-------------------	-----------

■ LED SMART LIGHT

Smart Ambient Light	103 - 106
Smart Light Source	107 - 110
Smart Down light	111 - 114
Smart Ceiling Light	115 - 118
Smart Fire Rate Down Light	119 - 120

Commercial Spotlight

■ ROLAND - 360° Rotatable

YA30K-A01
012YA25K-A01
012YK30K-A02
013YK25K-A02
013

■ JAMES - 360° Eco rotatable

SL06-A2501
015SL06-A2502
016

■ COREIN - Module

SL005-A01
019SL005-B01
019SL005-FR01
020SL005-FR02
020SL005-FR03
020SL005-FR04
020SL005-FS01
020SL005-FS02
020

■ MIRANDA - Deep recessed G1.5

SL015-W065
021SL015-W044
021SL015-N065
021SL015-N044
021

■ MINI EYES


SL004-A01
024SL004-A03
025SL003-GU10-C05
027

■ GU10



Commercial Downlight

■ PIZZA - Multi-fit

DA50M-6A
034DA65M-18A
034DA95M-23A
034DA65M-D
035DA65M-P
036DA65M-E
037

■ CAKE - Metal slim

DL007-A01D
039DL007-A02D
039DL007-A03D
039DL007-A04D
039

■ EIFFEL - Module

DL10-A30
043DL10-B30
044DL10-C30
045DL10-G60
046DL10-D30
047DL10-EM6006
048DL013-A01C
049

■ DE GAULLIST - Deep Recessed Downlight

DL005-B4S
050DL005-B6S
050DL005-B8S
050DL060-6
051DL060-8
051

■ MAGIC HAT

SL002-C01
054SL002-B01
055SL002-A03
056SL360-A03F
057SL361-A03F
058

■ CLOVER - Fire-rated

Residential Spotlight

■ AMBER - DIY slim

YD-25L
064YA-25L
064YA-25M
064

■ ROSEY - Metal slim

SL08-A01
065SL08-B01
065

■ SOFIA - DIY G3

DY25H-A01
067DY25H-B01
067DY25H-C01
067



■ CLIO - DIY high power

YD35J-A01
070YA35J-B01
070YD35J-D01S
070

■ AVALOR - DIY G4

SL05-B25
068SL05-C25
068SL05-A25
068SL05-D25-IP65
069SL05-D25-IP44
069

■ PEGGY / EMILY / BOX - Surface mounted

SP001-A01B
072SP001-A02B
072SP001-A03B
072SP001-A04B
072SP001-D01B
073SP001-D03B
073SP001-E01W
076SP001-E02W
076SP001-E04W
076

■ Module & Fixture

SL003-A01
078SL003-B01
078SL003-C01
078SL003-GU10B01
079SL003-GU10B02
079SL003-GU10B03
079

■ GECCO - GU10

SL003-GU10B01
079SL003-GU10B02
079SL003-GU10B03
079

Residential Downlight

■ FLYING - Backlit

DL002-A25
085DL002-A30
085DL002-A35
085DL002-A40
085DL002-A60
085DL002-A80
085

■ CREPE - Sidelit

DL001-075R
086DL001-100R
086DL001-125R
086DL001-150R
086DL001-220R
086DL001-075S
086DL001-110S
086DL001-125S
086DL001-150S
086DL001-220S
086

■ BAGEL - Cabinet light

DL008-A01
087DL008-B01
087

LED Ceiling and wall light


■ Ben

LT01-A06-13
091

■ Adeline

CL02-A21
092


■ Moon

CL03-A01
093

■ Muffin

CL04-A
095

■ CD Mirror

CL002-A11
097CL002-A15
097CL002-D12
098



▲ Foryou Industrial Park

PROFILE

Foryou Corporation

Established in **1993**, listed in **2017**
 Leading in auto electronics of China
2,000+ R&D engineers
 Auto Industry Quality Control System
560,000 square meters industrial park

Top 100 Electronic Information Enterprises Of China
Top 100 Enterprises In Guangdong
Top 500 Manufacturers of China
500 Most Influential Brands of Asian

About us



Huizhou Foryou Optoelectronic Technology Co., Ltd (ADAYO lighting) is a wholly-owned subsidiary of Foryou corporation, which entered the LED packaging industry in 2006, and established in 2012 with registered capital of 32 million US dollar. There are three business lines: LED package, LED high power driver and LED lighting. We are good at ODM, OEM projects and also can provide self-developed products for every target market.



Our lab covers an area of 1200m² which complies international standard and has more than 100 test equipments. Thus, we can do safety test, reliability test, photoelectric parameter test, dropping and shaking test, EMI and EMC test. Our factory is qualified with ISO9001, ISO14001 and the products can pass CE/CB/FCC/UL/SAA/BS476-20/BS476-21 and other international certifications.



Our professional sales team can provide consulting sales services for different markets; Our R&D team with more than 60 people, one third of them with more than 20 years of experience in the lighting industry. A new range of product will be launched every one month in average.

The rigorous quality team, controls quality with industry standard from the incoming materials, production, and finished products providing strong quality support for your sales.




There are more than 300 workers and 50 production lines of LED package, LED high power driver and LED lighting, including 30 automatic and semi-automatic lines, with a monthly capacity of 2 million pcs LED down light, LED ceiling light, LED spot light, LED smart light.

ADAYO lighting adheres to the spirit of hard work in the manufacturing industry, persists in reform and innovation, and joins hands with customers and peers from all walks of life to seek common development and win-win cooperation.

Certification



Main Business

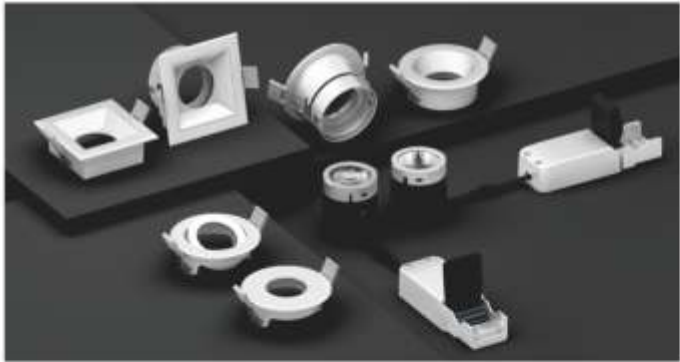

LED Lighting




LED Package



COMMERCIAL

LED Spotlight

ROLAND	360° Rotatable recessed spotlight	011 - 014
JAMES	360° ECO Rotatable recessed spotlight	015 - 016
COREIN	Module recessed spotlight	017 - 020
MIRANDA	Deep recessed spotlight G1.5	021 - 022
MINI EYES	Mini recessed spotlight	023 - 026
GU10 SPOT	GU10 spotlight	027 - 028

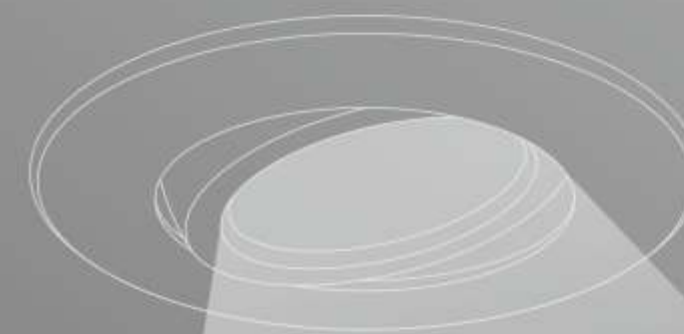

Commercial Spotlight

■ ROLAND - 360° Rotatable



YA30K-A01
012



YA25K-A01
012



YK30K-A02
013



YK25K-A02
013

■ JAMES - 360° Eco rotatable



SL06-A2501
015



SL06-A2502
016

■ COREIN - Module



SL005-A01
019



SL005-B01
019



SL005-FR01
020



SL005-FR02
020



SL005-FR03
020



SL005-FR04
020



SL005-FS01
020



SL005-FS02
020

■ MIRANDA - Deep recessed G1.5



SL015-W065
021



SL015-W044
021



SL015-N065
021



SL015-N044
021

■ MINI EYES



SL004-A01
024



SL004-A03
025



SL003-GU10-C05
027

■ GU10



360° ROTATABLE SPOT LIGHT



ROLAND I



Features

- 30° tiltable at all directions
- Insulation material coverable
- SMD solution with CCT selectable and Dim to warm functions
- IP65 for roomside

Water-proof

Front waterproof IP65

CCT Selectable

CCT3 switch changeable on driver

Triac Dim & Dim to Warm

Dimmable by dimmer

360° Rotation

30° tiltable at all directions

Iron Can


Be covered directly by insulation material



Application

Home, Shop, Specialty Stores, Showroom etc.

Finish optional

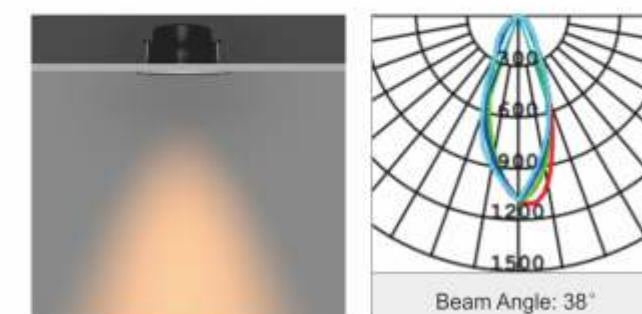

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
YA30K-A01DS/DC	8.5W	750lm	2700K/3000K/4000K	38°	Black/White/Silver Brushed Nickel	φ78mm	φ96x44mm
YA25K-A01DS/DC	6W	560lm	CCT3			φ65mm	φ81x41mm
YA25K-A01DW	6W	540lm	2200-2700			φ65mm	φ81x41mm
YA30K-A03FC/FS	8.5W	720lm	2700K/3000K/4000K	38°	Black/White/Silver Brushed Nickel	φ80mm	φ96x63mm
YA25K-A03FC/FS	6W	500lm	CCT3			φ68mm	φ81x63mm

ROLAND II



IP65



Application

Home, Shop, Specialty Stores, Showroom etc.

Finish optional



Features

- 30° tiltable at all directions
- Insulation material coverable
- COB solution with alu reflector provides uniform light
- IP65 for roomside

Water-proof

IP65 can be used into wet applications




360° Rotation

30° tiltable at all directions



Iron Can

Be covered directly by insulation material

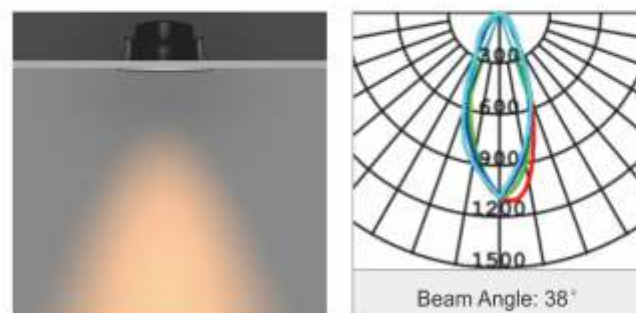

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
YA30K-A02	8.5W	850lm	2700K/3000K/4000K	38°	Black/White/Silver/Brushed Nickel	φ78mm	φ96x44mm
YA25K-A02	6W	680lm	2700K/3000K/4000K	38°	Black/White/Silver/Brushed Nickel	φ65mm	φ81x41mm
YA25K-A03	6W	500lm	2700K/3000K/4000K	38°	Black/White/Silver/Brushed Nickel	φ68mm	φ81x63mm



JAMES I




Features

- 30° tiltable at all directions
- Insulation material coverable
- SMD solution with CCT selectable and Dim to warm functions

Water-proof

Front waterproof IP54



360° Rotation

30° tiltable at all directions



CCT3

CCT3 switch changeable on driver



Application

Home, Office, Shop, Hotel etc.


Finish optional




Black



White

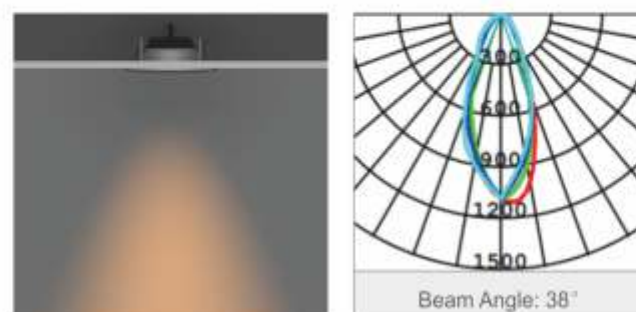

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL06-A2501DS	6W	550lm	3000K/4000K/6500K	38°	Black/White	φ68mm	φ81x32mm
SL06-A2501DC	6W	550lm	CCT3	38°	Black/White	φ68mm	φ81x32mm



JAMES II



Features

- 30° tiltable at all directions
- COB solution with aluminum reflector provides uniform light


Water-proof

Front waterproof IP54



360° Rotation

30° tiltable at all directions

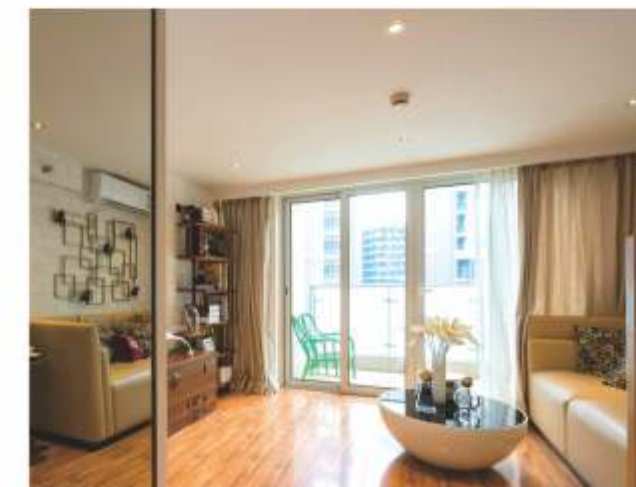

Application

Home, Office, Shop, Hotel etc.


Finish optional




Black



White

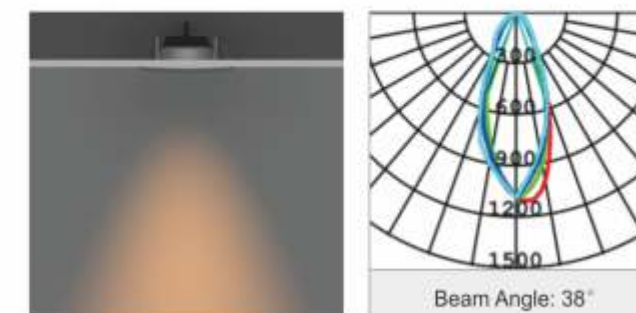


Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL06-A2502DS	6.5W	500lm	3000K/4000K/6500K	38°	Black/White	φ68mm	φ81x32mm



COREIN

MODULE RECESSED SPOTLIGHT

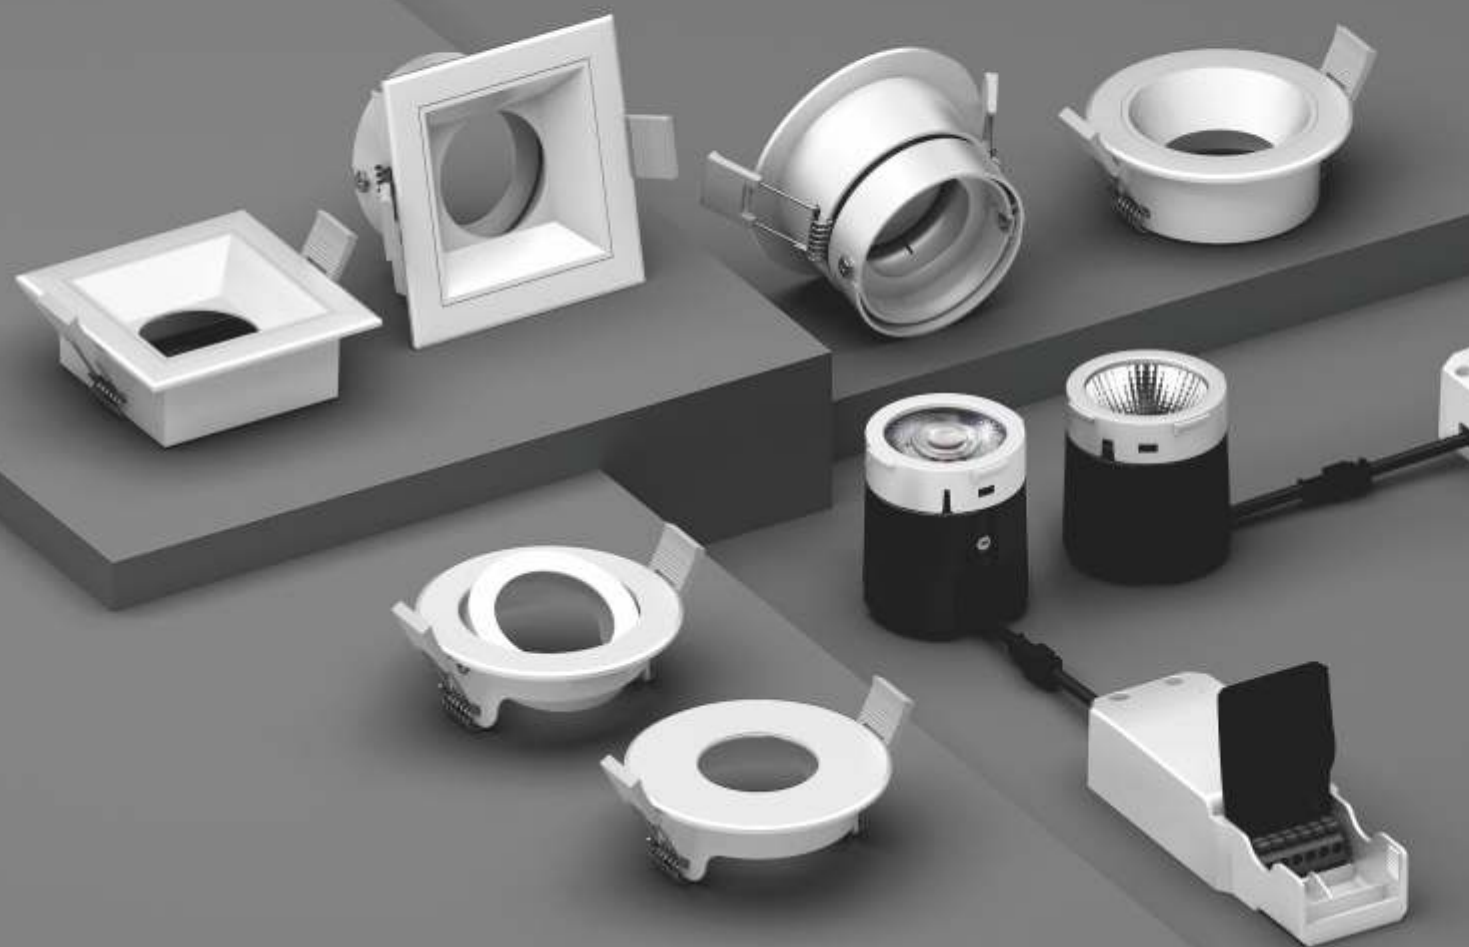

COREIN



Adjustable / Lens



Application

Home, Office, Shop, Hotel etc.

Features

- Module design, die-casting housing
- Isolated driver
- Beam angle 24°, 36° for choosing
- Fixed and adjustable available
- Lens and reflector versions optional
- 90-100lm/w, 5 years warranty



IP Class

IP65 for fixed version



Die-casting

Die-casting heat sink, heat fast

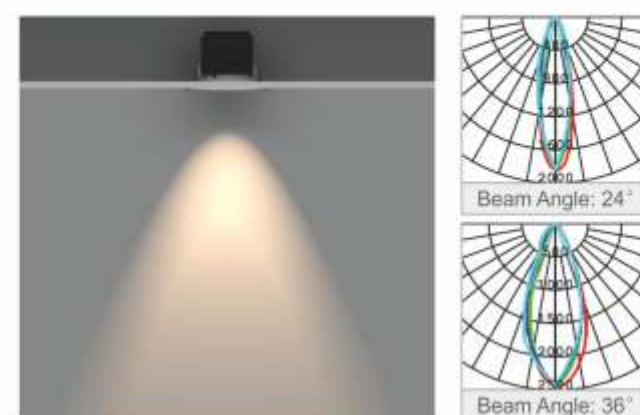
Insulation coverable
for 7W

Model	Wattage	Lumen	CCT	Beam	Type	Cut hole	Dimensions
SL07-A2507	7W	780lm					
SL07-A2510	10.5W	1100lm	2700K/3000K/4000K	24°/36°	Fixed/Adjustable	φ68mm	φ85x62mm
SL07-A2512	12.5W	1320lm		36°			



EXTENTION TRIM

SL005-FR01
Fixed



Finish: White
Material: Aluminum body
Size: φ85x28mm

SL005-FR02
Adjustable

Finish: White
Material: Aluminum body
Size: φ85x28mm

SL005-FR03
Fixed



Finish: White
Material: Aluminum body
Size: φ85x28mm

SL005-FR04
Adjustable


Finish: White
Material: Aluminum body
Size: φ85x50mm

SL005-FS01
Fixed

Finish: White
Material: Aluminum body
Size: 85x85x28mm

SL005-FS02
Adjustable

Finish: White
Material: Aluminum body
Size: 85x85x50mm



MIRANDA

SL015-W044
(Adjustable)SL015-W065
(Fixed)

IP65

SL015-N065
(Fixed)

IP65

SL015-N044
(Adjustable)

Features

- Deep recessed and anti-glare
- Die-casting housing, good heat dissipation
- Dimming and IP65 / IP44 optional

Water-proof

Front waterproof IP44/IP65
available



Quick install

Screw free
Loop in loop out



Application

Home, Office, Shop, Hotel etc.


Color of Reflector optional



Black



White



Model	Wattage	Lumen	CCT	Beam	Type	IP Rate	Cut hole	Dimensions
SL015-W044	9W	700lm	3000K/4000K/6500K	38°	Adjustable	IP44	φ68mm	φ86x62mm
SL015-N044	9W	650lm	3000K/4000K/6500K	38°	Adjustable	IP44	φ68mm	φ86x62mm
SL015-W065	9W	700lm	3000K/4000K/6500K	38°	Fixed	IP65	φ68mm	φ86x62mm
SL015-N065	9W	650lm	3000K/4000K/6500K	38°	Fixed	IP65	φ68mm	φ86x62mm



MINI EYES



Application
Wardrobe, Cupboard, Bookcase, Cabinet , Indoor space.

Finish optional




- Features**
- Die-casting aluminum body, good heat dissipation
 - Small size for narrow space

Small Size
The 25mm mini size is suitable for a more narrow space



Aluminum Body
Die-casting aluminum body, good heat dissipation



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL004-A1	1W	70lm	3000K/6500K	36°	Silver/Black/White	φ28mm	φ38x25mm

MINI EYES




Features

- Die-casting aluminum body, good heat dissipation
- Small size for narrow space
- 12pcs with a junction box and one driver
- RF remote control dimming and group setting

Water-proof

Front waterproof IP65 available



Aluminum Body

Die-casting aluminum body, good heat dissipation



Remote Control

Dimming and group setting



Application

Bathroom Cabinet, Kitchen, Balcony, Canopy etc.

Accessories




Driver & Junction box



RF remote control dimming

Line Art

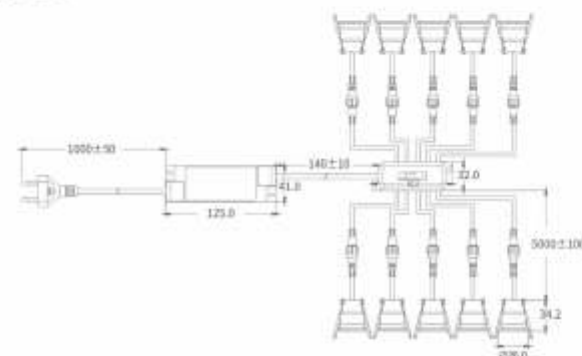

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL004-A3	3W	210lm	3000K/6500K	38°	φ28mm	φ36x34mm



GU10 SPOT

50000hrs



White / CCT2



Application

Hotel, shops, showroom etc.

Finished optional



White




Grey

Features

- Suitable for sealed fixtures or fixtures under insulation material
- COB-like lens, providing uniform light
- One-piece heatsink, better heat dissipation capability
- Compatible with leading edge and trailing edge dimmers
- CCT selectable
- White, grey color optional
- Ra90, up to 100lm/W
- 50000hrs lifespan, 5years' warranty

Used inside sealed fixtures or fixtures under insulation material



Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimensions
SL003-GU10B01	5W	460lm/470lm/500lm	2700K/3000K/4000K	38°	IP20/IP44	φ50x54mm



COMMERCIAL

LED Downlight

PIZZA	Multi-fit downlight	033 - 038
CAKE	Metal slim downlight	039 - 040
EIFFEL	Module downlight	041 - 049
DE GAULLIST	Deep recessed downlight UGR19	050 - 050
MAGIC HAT	Deep recessed downlight UGR22	051 - 052
CLOVER/ROLAND	Fire-rated downlight	053 - 058



Commercial Downlight

■ PIZZA - Multi-fit DL05M-6A
034DL06M-18A
034DL09M-23A
034DL06M-D
035DL06M-P
036DL06M-E
037

■ CAKE - Metal slim

DL007-A01D
039DL007-A02D
039DL007-A03D
039DL007-A04D
039■ EIFFEL - Module DL10-A30
043DL10-B30
044DL10-C30
045DL10-G60
046DL10-D30
047DL10-EM6006
048DL013-A01C
049

■ DE GAULLIST - Deep Recessed Downlight

DL005-B4S
050DL005-B6S
050DL005-B8S
050DL060-6
051DL060-8
051

■ MAGIC HAT

■ CLOVER - Fire-rated

SL002-C01
054SL002-B01
055SL002-A03
056SL360-A03F
057SL361-A03F
058

MULTI-FIT FLAT DOWNLIGHT



Quick install

Screw free
Loop in loop out

Adjust lever

Adjustable buckle cut size
Φ 50-260mm

22mm

CCT3

CCT3 changeable
optional

Multi-power

Bezels optional:

Detachable trim bezels of
4 colors.



Black

Brushed Nickel

Silver

Chrome

PIZZA



Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 50-260mm
- CCT3 switch on the back
- Dimming, non-dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm


Cut Out

For Φ50mm-Φ260mm cut hole



Ultra-slim

The ultra-slim design satisfies a
narrow space with more elegance



CCT3 & Multi-power

CCT3 & Multi-power changeable
switch on back



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DA50M-6A	6W	600lm	3000K-4000K-6500K	110°	Φ50-125mm	Φ165x22mm
DA50M-12A	12W	1200lm			Φ50-125mm	Φ165x22mm
DA65M-18A-01	18W	1800lm			Φ65-185mm	Φ217x22mm
DA65M-18A-02	18W	1900lm			Φ65-260mm	Φ290x22mm
DA95M-23A	23W	2450lm	3000K-4000K	110°	Φ65-260mm	Φ290x22mm
DA50M-12B	9W-18W	1100lm-2200lm			Φ65-185mm	Φ217x22mm
DA65M-18B	15W-23W	2000lm-3050lm			Φ65-260mm	Φ290x22mm

PIZZA-DALI



Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 65-260mm
- CCT3 switch on the back
- High lighting efficiency 100-120lm/w
- DALI dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm

Color of Bezels optional




Cut Out

For Φ 65mm- Φ 260mm cut hole

Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



Multi-power

Multi-power changeable switch on driver



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DA65M-D	17.5W	2000lm/2100lm	3000K-4000K	110°	Φ 65-185mm	Φ 217x22mm
DA95M-D	22W	2650lm/2800lm	3000K-4000K	110°	Φ 65-260mm	Φ 290x22mm



PIZZA SENSOR



Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 65-185mm
- PIR Infrared sensor, you can set the off time 5s/30s/60s/180s after leaving

Cut Out

For Φ 60mm- Φ 185mm cut hole



Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



PIR infrared Sensor

Can set light off time 5s/30s/60s/180s after leaving

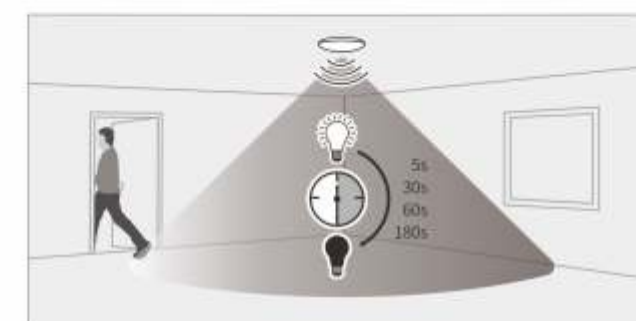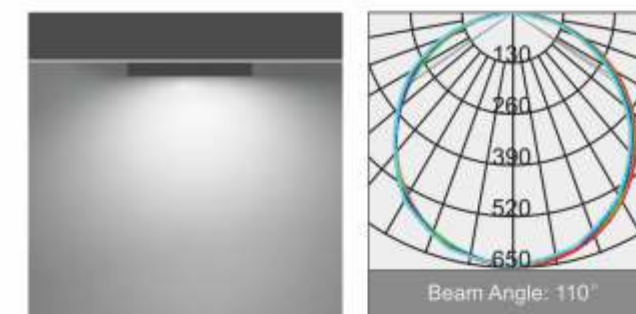

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DA65M-P	9W-18W	900lm-1800lm	CCT3	110°	Φ 65-185mm	Φ 227x22mm



PIZZA EMERGENCY



Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 65-185mm
- Emergency response time: 3 hours
- High lighting efficiency 100-120lm/W
- Power failure can be automatically lit up




Cut Out

For Φ 65mm- Φ 185mm cut hole



Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DA65M-E	20.5W	2000lm/2100lm	3000K-4000K	110°	Φ 65-185mm	Φ 227x22mm
DA95M-E	25.5W	2800lm/3000lm	3000K-4000K	110°	Φ 65-260mm	Φ 290x22mm



CAKE

**Application**

Home, Office, Shop, Hotel etc.

Features


- Metal slim body height 38mm
- External isolated driver
- Excellent dimming performance

IP44 Design

IP44 from front

**Metal Housing**

One piece stamped metal housing



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL007-A01D	7W	570lm	2700K/3000K/4000K	100°	φ90mm	φ112x37mm
DL007-A02D	12W	920lm			φ120mm	φ146x38mm
DL007-A03D	15W	1200lm			φ150mm	φ180x38mm
DL007-A04D	25W	2100lm			φ200mm	φ235x38mm





Deep recessed downlight
(Diffuser)



Deep recessed downlight
(Reflector)



Surface-mounted downlight
(Diffuser)



Slight recessed downlight
(Diffuser)



Flat recessed downlight
(Diffuser)

Combination of accessories

Module



Extention Recessed Trim



Surface-mounted Trim



EIFFEL



Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- Module design
- CCT selectable
- High lighting efficiency 100lm/W
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty



Module design

The module can work with different trims




CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL10-A30	6W	550lm	CCT3	100°	φ90mm	φ110x37mm
DL10-A40	9W	900lm			φ120mm	φ140x37mm
DL10-A60	15W	1600lm			φ150mm	φ168x37mm
DL10-A80	21W	2300lm			φ200mm	φ214x37mm



EIFFEL



Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- Module design
- CCT selectable
- High lighting efficiency 100lm/W
- Up to 120lm/W for some items
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty



Module design

The module can work with different trims



CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Dim	Cut hole	Dimensions
DL10-B30A	6W	525lm	CCT3	100°	Triac Dim	φ90mm	φ120x52mm
DL10-B40A	9W	850lm				φ120mm	φ150x52mm
DL10-B60A	15W	1550lm				φ150mm	φ175x52mm
DL10-B80A	21W	2280lm				φ200mm	φ230x52mm
DL10-B30B	6W	550lm	CCT3	100°	Non Dim	φ90mm	φ120x52mm
DL10-B40B	9W	900lm				φ120mm	φ150x52mm
DL10-B60B	15W	1750lm				φ150mm	φ175x52mm
DL10-B80B	21W	2550lm				φ200mm	φ230x52mm

EIFFEL



Features

- Module design
- CCT selectable
- High lighting efficiency 100lm/W
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty



Module design

The module can work with different trims



CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Application

Mall, Hall, Meeting Room, Hotel etc.

Color of reflector optional




Black reflector



Silver reflector



Mirror reflector



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL10-C30	6W	480lm	CCT3	100°	φ90mm	φ120x70mm
DL10-C40	9W	800lm			φ120mm	φ150x70mm
DL10-C60	15W	1400lm			φ150mm	φ176x86mm
DL10-C80	21W	2100lm			φ200mm	φ230x80mm

EIFFEL



Features

- Module design
- CCT selectable
- High lighting efficiency 100lm/W
- Up to 120lm/W for some items
- Tool free installation
- 50000hrs lifespan, 5 years warranty



Module design

The module can work with different trims



CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Application

Mall, Hall, Meeting Room, Hotel etc.

Finished optional



Black



White



Model	Wattage	Lumen	CCT	Beam	Efficacy	Finish	Dim	Dimensions
DL10-G60A	15W	1600lm	CCT3	100°	110lm/W	Black/White	Triac Dim	φ150x75mm
DL10-G80A	21W	2350lm						φ200x75mm
DL10-G60B	15W	1750lm	CCT3	100°	120lm/W	Black/White	Non Dim	φ150x75mm
DL10-G80B	21W	2550lm						φ200x75mm



EIFFEL



Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- UGR 22
- Aluminum reflector
- CCT selectable, SDCM<6
- High lighting efficiency 120lm/W
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty


CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Dim	Cut hole	Dimensions
DL10-D30	6W	700lm	CCT3	80°	Non Dim	φ90mm	φ110x71mm
DL10-D40	9W	1100lm				φ120mm	φ146x86mm
DL10-D60	15W	1850lm				φ150mm	φ176x86mm
DL10-D80	21W	2650lm				φ200mm	φ226x86mm
DL10-DA60	7W	780lm	3000K-4000K	80°	DALI Dim	φ90mm	φ110x71mm
DL10-DA80	9W	1050lm				φ120mm	φ146x86mm
DL10-DA60	16W	1950lm				φ150mm	φ176x86mm
DL10-DA80	22W	2700lm				φ200mm	φ226x86mm

EIFFEL - EMERGENCY



Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- UGR< 22
- Aluminum reflector
- CCT selectable, SDCM<6
- High lighting efficiency 120lm/W
- Emergency response time: 3 hours
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty


CCT2

CCT2 changeable switch on back




Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL10-EM6006	6W	700lm	3000K-4000K	80°	φ90mm	φ110x71mm
DL10-EM8009	9W	1050lm			φ120mm	φ146x86mm
DL10-EM6015	15W	1850lm			φ150mm	φ176x86mm
DL10-EM8021	21W	2650lm			φ200mm	φ226x86mm

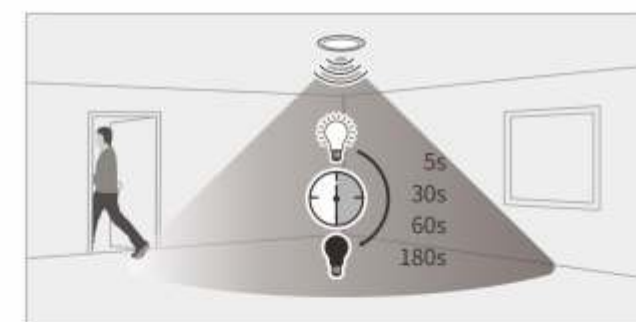

EIFFEL



IP65



Application

Home, Office, Shop, Hotel etc.



Features

- Non dim and DALI
- Single color temperature and CCT2 optional
- Tooling free design save the installation cost
- IP65 can be used into wet applications
- 80° UGR<22, 60° UGR<19
- Up to 120-130lm/W
- 5years warranty



Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimensions
DL013-A01C	6W	650lm	CCT2	80° (UGR<22) 60° (UGR<19)	IP65	φ95x100mm
DL013-A02C	10W	1000lm				φ123x120mm
DL013-A03C	15W	1800lm				φ155x140mm
DL013-A04C	21W	2500lm				φ204x189mm
DL013-A01S	10W	1200lm	3000K/4000K	80° (UGR<22) 60° (UGR<19)	IP65	φ95x100mm
DL013-A02S	15W	1800lm				φ123x120mm
DL013-A03S	20W	2600lm				φ155x140mm
DL013-A04S	30W	3900lm				φ204x189mm



DE GAULLIST



Application

Office, Shopping Mall, Hotel, Airport etc.

Features

- Anti-glare, UGR<14 & UGR<19
- Integrated design, easy to install
- Multi-power and CCT3 optional
- 5 years warranty

Reflector Optional

Changeable reflector



CCT3

CCT3 changeable switch on back



Model	Wattage	Lumen	CCT	UGR	Beam	Cut hole	Dimensions
DL005-B4S	9W	1100lm	2700K/4000K/6500K	19	60°	φ125mm	φ145x92mm
DL005-B4C			CCT3	19	60°		
DL005-B4S-14			2700K/4000K/6500K	14	38°		
DL005-W6S	13W	1600lm	2700K/4000K/6500K	19	60°	φ150mm	φ175x110mm
DL005-W6C			CCT3	19	60°		
DL005-W6S-14			2700K/4000K/6500K	14	38°		
DL005-B8S	20W	2400lm	2700K/4000K/6500K	19	60°	φ200mm	φ220x140mm
DL005-B8C			CCT3	19	60°		
DL005-B8S-14			2700K/4000K/6500K	14	38°		

MAGIC HAT



Features

- Anti-glare. UGR<22
- Integrated design, easy to install
- Good heat dissipation performance

Heat Sink

Good heat dissipation performance




Quick install

Screw free
Loop in loop out



Application

Mall, Hall, Meeting Room, Hotel etc.



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL060-6	12W	1000lm	2700K/4000K/6500K	100°	φ150mm	φ173x98mm
DL060-8	21W	2100lm			φ206mm	φ233x106mm



FIRE RATED DOWNLIGHT

Fire resistance test : BS476-20 / BS476-21



Quick install

Screw free
Loop in loop out



Insulation Cover

Can be covered by insulation directly



Male and female plug

Quick installation and can
easy change to other drivers



90 min anti-fire test



Front CCT3 Switch

2700K-6500K



Anti-glare design

Deep anti-glare

Accessories

Detachable trim bezels of 4 colors.



Brushed Nickel



Chrome



Silver



Black



IP65



Application

Home, Office, Shop, Hotel etc.

Features

- 90 min anti-fire test
- Up to 300mm height insulation coverable insulation material
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out
- Wifi function available
- Low profile design, good for narrow space



Fire-rated

Pass 90min anti-fire test



CCT3

Front switch to change the CCT



Quick install

Screw free
Loop in loop out



Color of Bezels optional



Brushed Nickel




Chrome



Silver



Black



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-C01S	6W	500lm	3000K/4000K/6500K	60°	φ68mm	φ88x40mm
SL002-C01C	6W	500lm	CCT3			

CLOVER IV



Application

Home, Office, Shop, Hotel etc.

Features

- 90 min anti-fire test
- Up to 300mm height insulation coverable insulation material
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out

Fire-rated

Pass 90min anti-fire test



Quick install

Screw free
Loop in loop out



CCT3

Front switch to change the CCT



Color of Bezels optional




Brushed Nickel

Chrome

Silver

Black

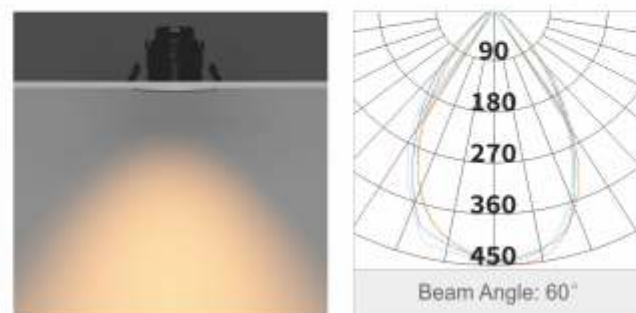

Beam Angle: 60°



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-B01S	6W	500lm	3000K/4000K/6500K	60°	φ68mm	φ88x64mm
SL002-B01C	6W	500lm	CCT3			

CLOVER III



Application

Home, Office, Shop, Hotel etc.

Features

- 90 min anti-fire test
- Up to 300mm height insulation coverable insulation material
- CCT3 changeable optional
- 3pin loop in and loop out
- Separated isolated driver with built in terminal
- Male & female plug between driver and lamp
- Wifi version optional

Fire-rated

Pass 90min anti-fire test



Quick install

Screw free
Loop in loop out



CCT3

Front switch to change the CCT



Color of Bezels optional




Brushed Nickel

Chrome

Silver

Black

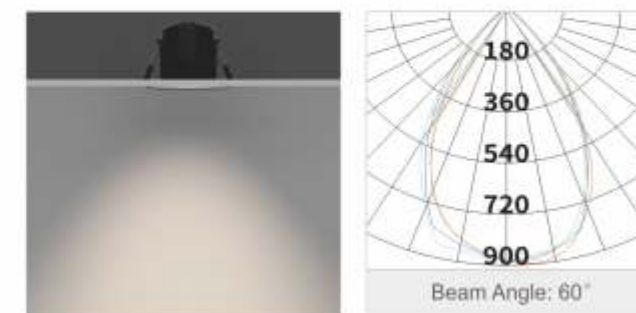

Beam Angle: 60°



Model	Wattage	Lumen	CCT	LED Type	Beam	Cut hole	Dimensions
SL002-A03S	8.5W	600lm	3000K/4000K/6500K	COB	60°	φ70mm	φ88x65mm
SL002-A03C	8.5W	600lm	CCT3	SMD	60°	φ70mm	φ88x65mm

ROLAND III



Features

- 90 min anti-fire test
- CCT3 and dimming
- Tooling free installation
- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Can be used as fire rated down light with a iron can cover

Fire-rated

Pass 90min anti-fire test



360° Rotation

30° tiltable at all directions



CCT3

CCT3 switch changeable on driver



Iron Can


Be covered directly by insulation material



Application

Home, Office, Shop, Hotel etc.

Finish optional

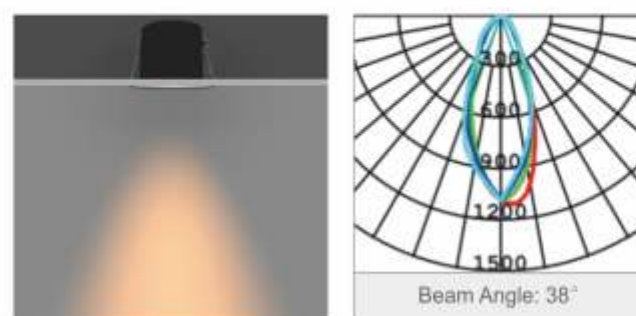

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A03FC	8.5W	720lm	CCT3	38°	Black/White/Silver	φ80mm	φ96x63mm
SL360-A03FS	8.5W	720lm	3000K/4000K/6500K	38°	Black/White/Silver	φ80mm	φ96x63mm
SL360-B03FC	6W	500lm	CCT3	38°	Black/White/Silver	φ68mm	φ81x63mm
SL360-B03FS	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ68mm	φ81x63mm

ROLAND V



Features

- 90 min anti-fire test
- CCT3 and dimming
- Tooling free installation
- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Can be used as fire rated down light with a iron can cover

Fire-rated

Pass 90min anti-fire test



360° Rotation

30° tiltable at all directions



CCT3

CCT3 switch changeable on driver



Iron Can


Be covered directly by insulation material



Application

Home, Office, Shop, Hotel etc.

Finish optional

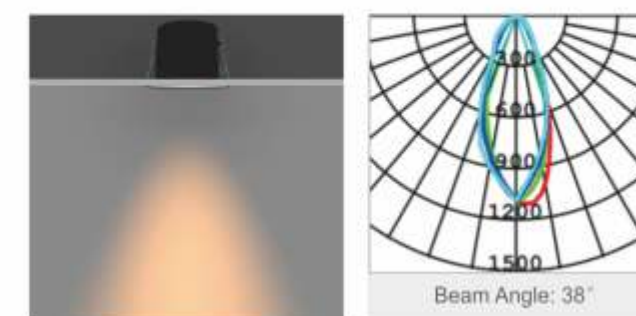

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-A03FC	6W	500lm	CCT3	38°	Black/White/Silver	φ68mm	φ81x63mm
SL361-A03FS	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ68mm	φ81x63mm

RESIDENTIAL

LED Spotlight

AMBER	DIY slim recessed spot light	064 - 064
ROSEY	Metal slim recessed spot light	065 - 066
SOFIA	DIY G3 recessed spot light	067 - 067
AVALOR	DIY G4 recessed spot light	068 - 069
CLIO	DIY high power recessed spot light	070 - 070
PEGGY / EMILY / BOX	Surface mounted spot light	071 - 076
MODULE	Module & fixture	077 - 078
GECO	GU10	079 - 080



Residential Spotlight

■ AMBER - DIY slim

YD-25L
064YA-25L
064YA-25M
064

■ ROSEY - Metal slim

SL08-A01
065SL08-B01
065

■ SOFIA - DIY G3

DY25H-A01
067DY25H-B01
067DY25H-C01
067


■ CLIO - DIY high power

YD35J-A01
070YA35J-B01
070YD35J-D01S
070

■ AVALOR - DIY G4

SL05-B25
068SL05-C25
068SL05-A25
068SL05-D25-IP65
069SL05-D25-IP44
069

■ PEGGY / EMILY / BOX - Surface mounted

SP001-A01B
072SP001-A02B
072SP001-A03B
072SP001-A04B
072SP001-D01B
073SP001-D03B
073SP001-E01W
076SP001-E02W
076SP001-E04W
076

■ Module & Fixture

SL003-A01
078SL003-B01
078SL003-C01
078

■ GECCO - GU10

SL003-GU10B01
079SL003-GU10B02
079SL003-GU10B03
079

DIY

RECESSED SPOT LIGHT



Tool-free

Loop in and loop out

Bezels optional:

Different bezels changeable easily.



Brushed Nickel

Chrome

Silver

Black

AMBER



YD-25L



YD-25L



YA-25M

Features

- different colors of bezels optional
- IP20/IP44/IP65 optional
- Tooling free design save the installation cost
- Ultra-thin design suitable for narrow space

Water-proof


Front waterproof IP44/IP65

360° Rotation

30° tiltable at all directions

Ultra-slim

Ultra-slim design for narrow space



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Accessories




Plastic insulation cover



Junction Box

Line Art

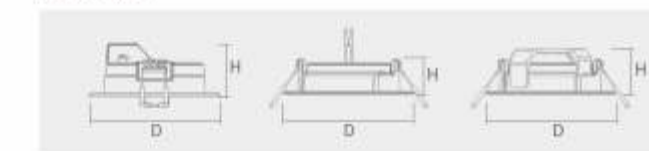

Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
YD-25L-01	4.8W	400lm	2700K/3000K/4000K	100°	IP65	φ68mm	φ87x35mm
YA-25L-01	4.8W	400lm	2700K/3000K/4000K	38°	IP44/IP20	φ68mm	φ87x24mm
YA-25M-01	4.8W	400lm	2700K/3000K/4000K	38°	IP44/IP20	φ68mm	φ87x30mm

ROSEY



Features

- IP65 for roomside
- Die-casting trim Slim design for narrow space
- Aluminum reflector and PC lens optional
- CCT selectable
- Built-in driver
- Extra junction box optional

IP Class

Front waterproof IP65



CCT3

CCT3 changeable switch on back



Slim body

Slim body for narrow space installation



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Black / Lens



Black / Reflector

Accessories



Junction Box



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL08-A01	6.5W	630lm	CCT3	38°	Black/White	φ75mm	φ85x30mm
SL08-B01	6.5W	630lm					φ85x30mm



SOFIA



Application

Home, Office, Shop, Hotel etc.

Features

- Different colors bezels optional
- IP20/IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Color of Bezels optional



IP Class

Front waterproof IP44/IP65 available



CCT3

CCT3 changeable switch on back



Quick install


Screw free
Loop in loop out

Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
DY25H-A01	7W	600lm	3000K/4000K/6500K	100°	IP65	φ68mm	φ87x47mm
YD25H-A02	7W	600lm	CCT3				
DY25H-C01	5W	450lm	3000K/4000K/6500K	38°	IP44	φ68mm	φ87x47mm
YD25H-C02	5W	450lm	CCT3				
DY25H-B01	5W	450lm	3000K/4000K/6500K	100°	IP20	φ68mm	φ87x47mm

Accessories

Can be installed
directly into the
insulation

AVALOR

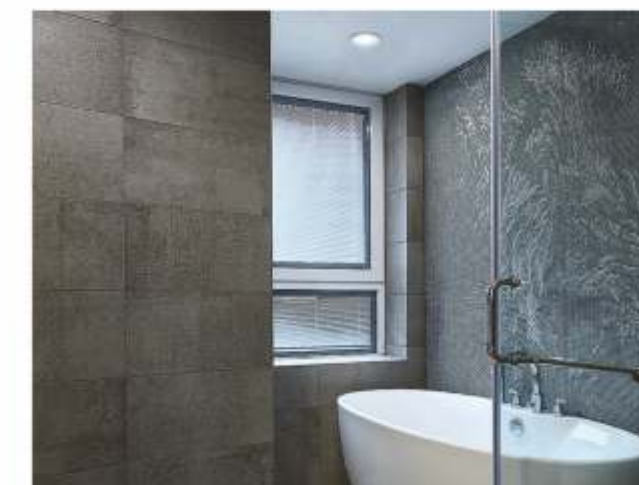

Application

Home, Office, Shop, Hotel etc.

Features

- Different colors bezels optional
- IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers

Color of Bezels optional



IP Class

Front waterproof IP44/IP65 available



CCT3

CCT3 changeable switch on back and on wall



Quick install

Screw free
Loop in loop out

Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL05-A25D/C25D	5.5W	550lm	3000K/4000K/6500K	38°/60°	IP44/IP65	φ68mm	φ87x47mm
SL05-A25C/C25C	5.5W	550lm	CCT3				
SL05-B25D	6.5W	600lm	3000K/4000K/6500K	100°	IP65	φ68mm	φ87x47mm
SL05-B25C	6.5W	600lm	CCT3				

AVALOR



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Features

- Different colors bezels optional
- IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers

IP Class

Front waterproof IP44/IP65 available



CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out

Accessories



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL05-D25-IP65	5.5W	560lm	3000K/4000K/6500K	38°	IP65	φ68mm	φ87x47mm
SL05-D25-IP44	5.5W	560lm	3000K/4000K/6500K	38°	IP44	φ68mm	φ87x47mm

CLIO



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Features

- Different colors bezels can be changed easily
- IP44 and IP65 can be used into wet applications
- Tooling free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

IP Class

IP44 and IP65 can be used into wet applications



CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out


Accessories



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
YD35J-A01D	10W	1000lm	3000K/4000K/6500K	100°	IP65		
YD35J-A01C	10W	1000lm	CCT3				
YA35J-B01D	9W	800lm	3000K/4000K/6500K	38°	IP44	φ85mm	φ105x59mm
YA35J-B01C	9W	800lm	CCT3				
YD35J-D01S	8W	700lm	3000K/4000K/6500K	100°	IP54		

DECO SPOT LIGHT

Modular design

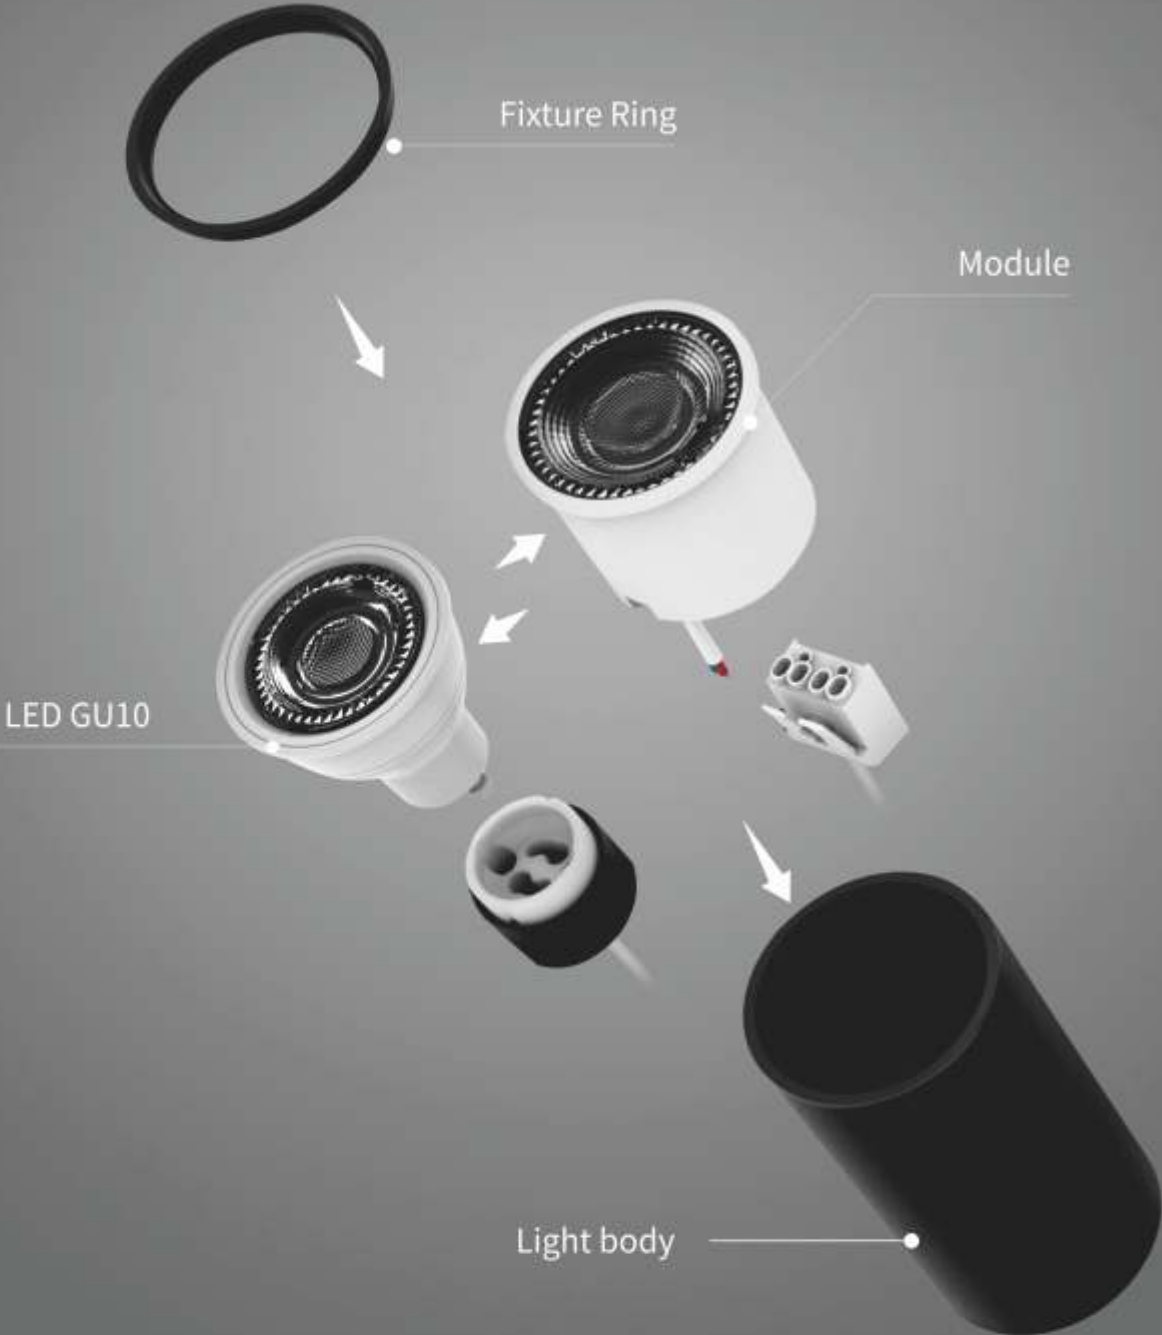

PEGGY



SP001-A03B



SP001-A01B



SP001-A02B




SP001-A04B



Application

Home, Office, Shop, Hotel etc.

Line Art

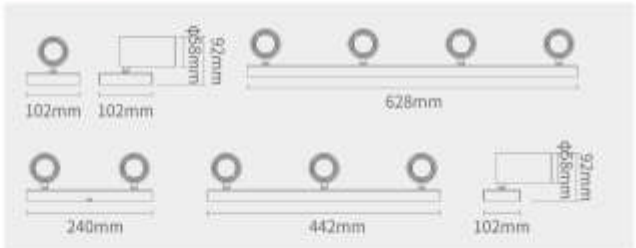

Features

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable

350° Rotatable

Vertically tilt 90°, horizontally rotate 350°



Light Source Optional

Can be used with GU10 or module



Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP001-A01B	1x5W	450lm	3000K/4000K	38°	GU10/ Module	φ58x102x92mm
SP001-A02B	2x5W	900lm				φ58x240x92mm
SP001-A03B	3x5W	1350lm				φ58x442x92mm
SP001-A04B	4x5W	1800lm				φ58x628x92mm

EMILY



SP001-D03B



SP001-D01B

Features

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable

350° Rotatable

Vertically tilt 90°, horizontally rotate 350°



Light Source Optional


Can be used with GU10 or module




Application

Home, Office, Shop, Hotel etc.

Line Art

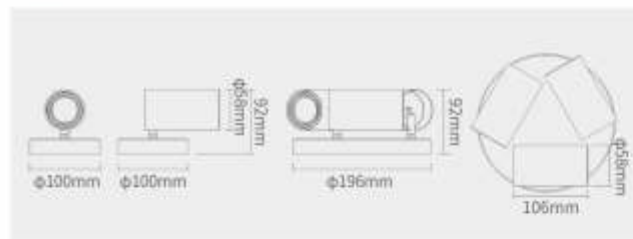

Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP003-D01B	1x5W	400lm	3000K/4000K/6500K	38°	GU10/ Module	φ58xφ100x92mm
SP003-D03B	3x5W	1200lm				φ58xφ196x92mm

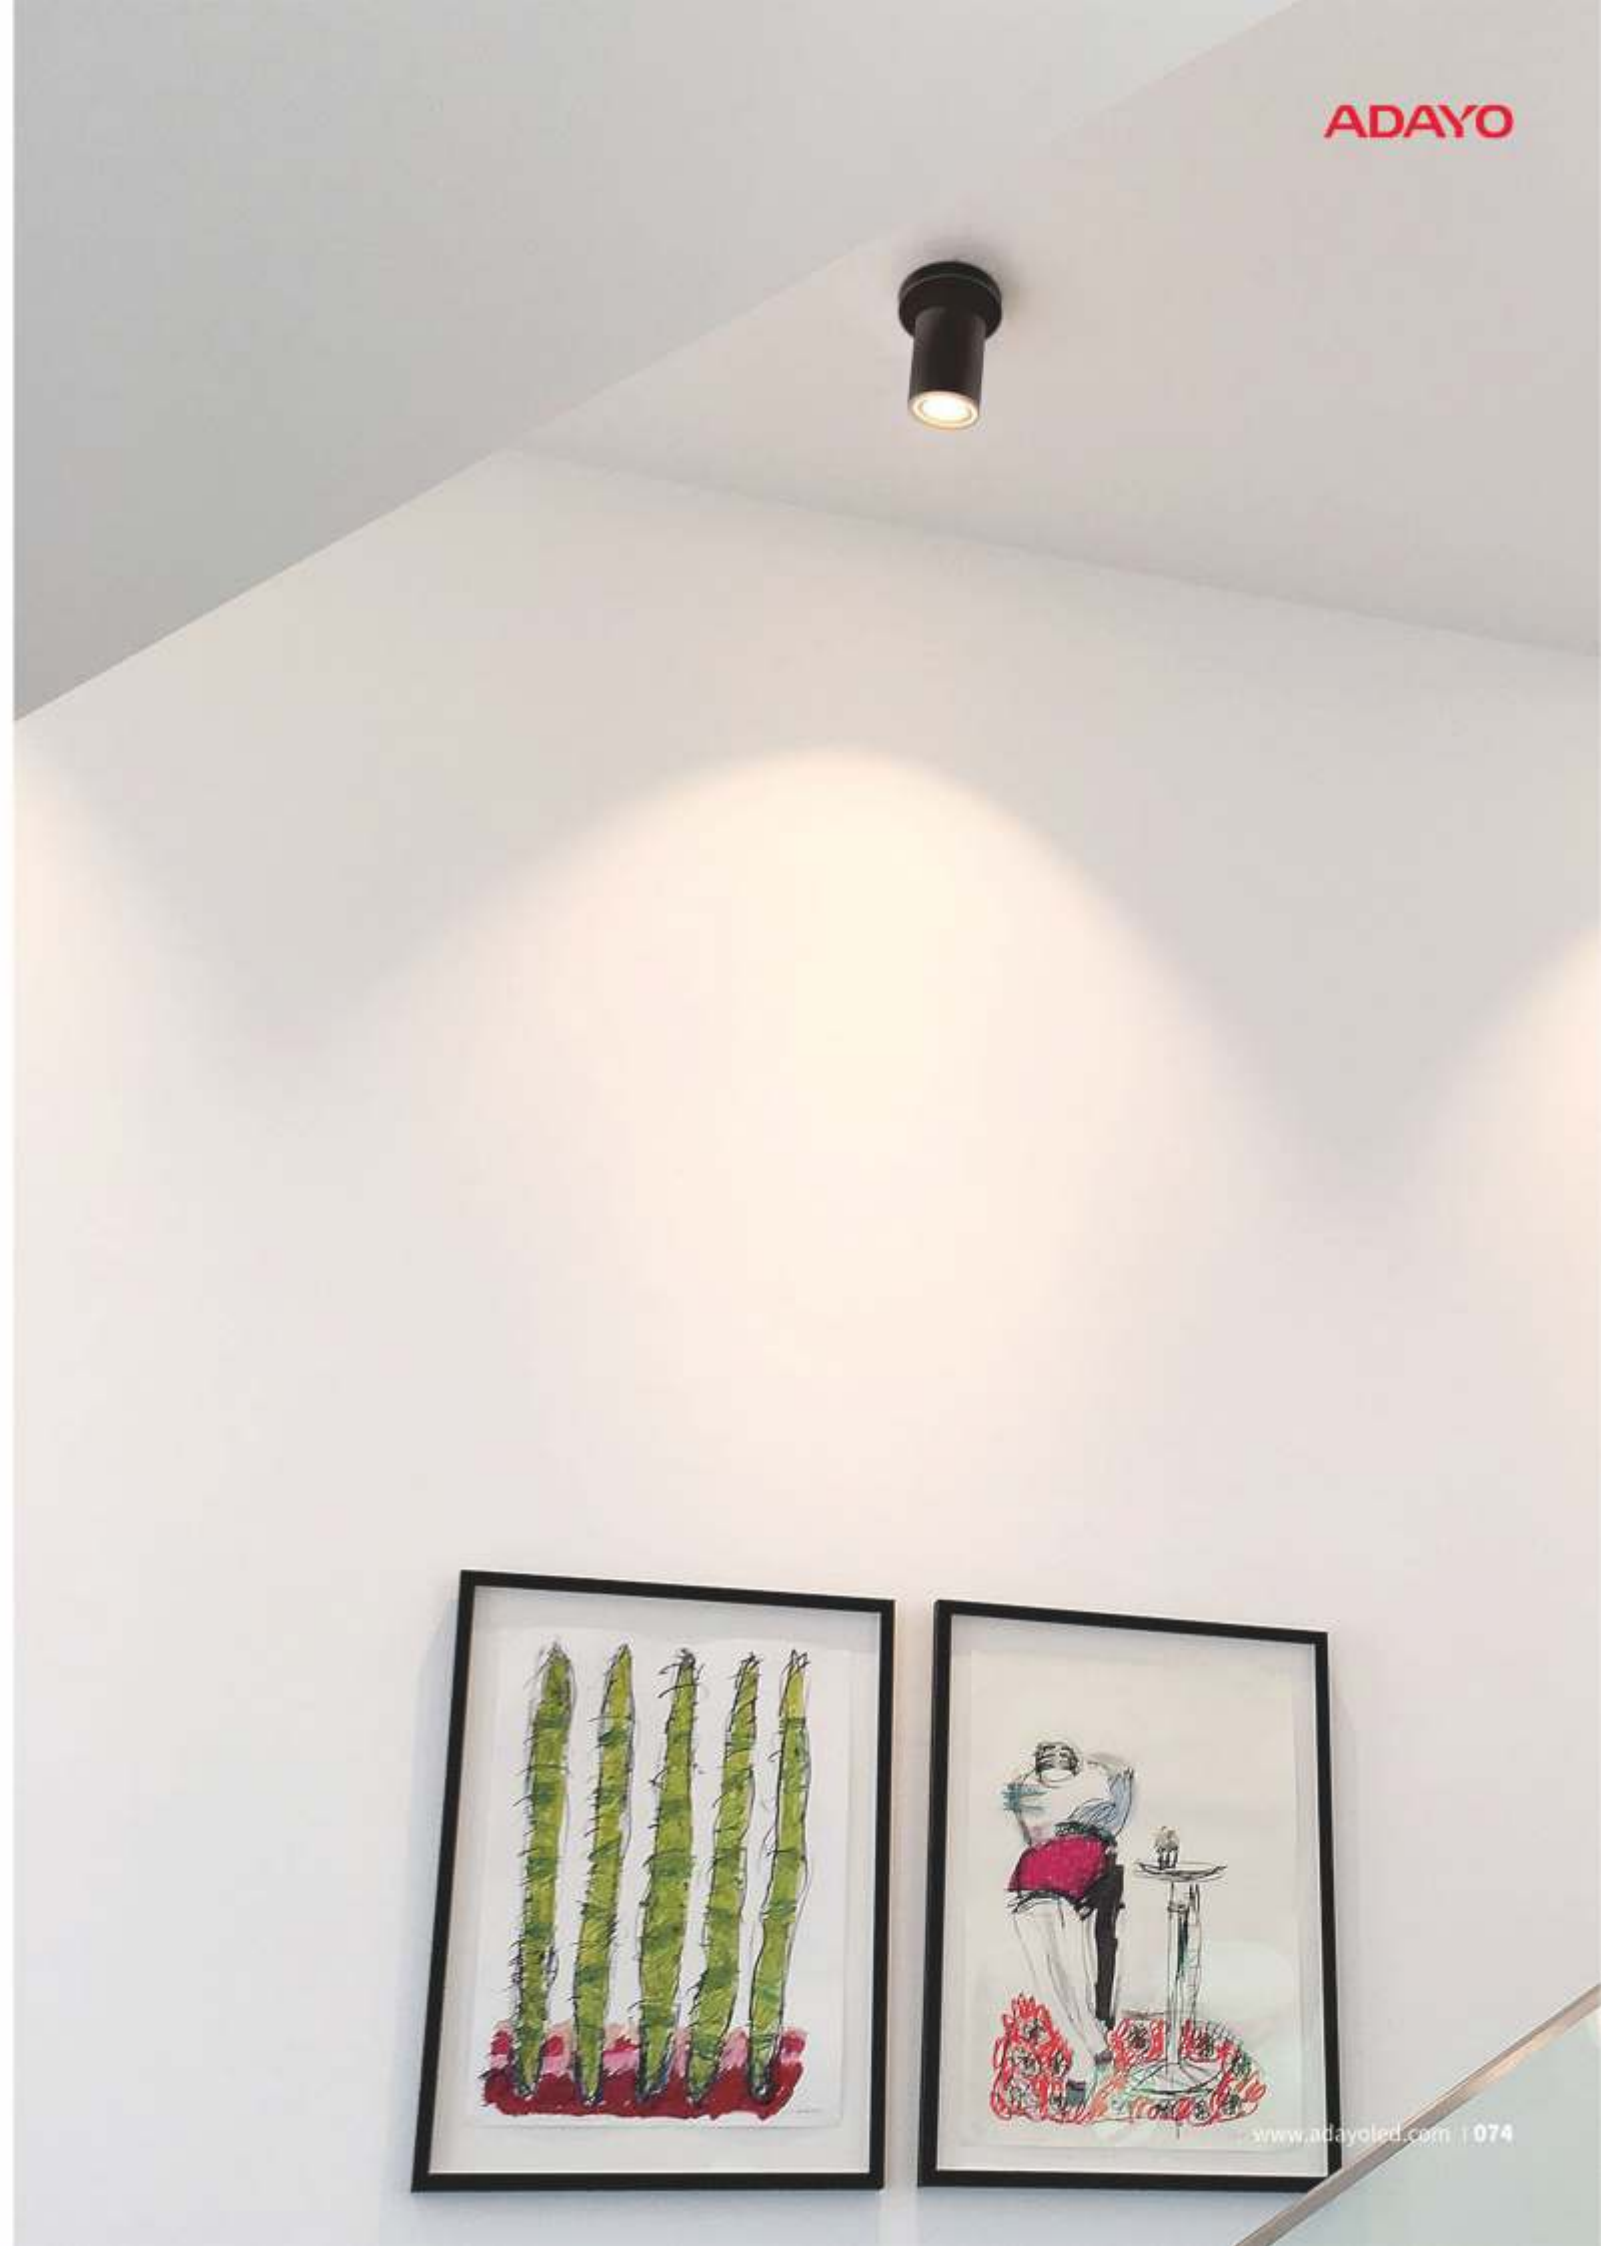

DECO SPOT LIGHT - BOX



GU10



BOX



SP001-E01W



SP001-E02W



SP001-E04W



SP001-E01B



SP001-E02B




SP001-E04B



Application

Home, Office, Shop, Hotel etc.

Line Art

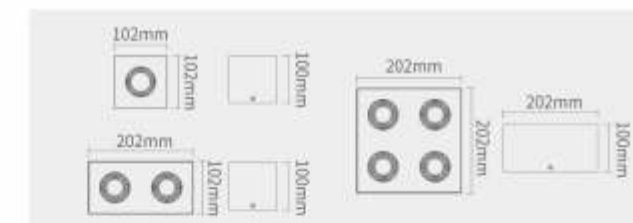

Features

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- Adjustable tilt 30° & rotation 350°





Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
SP001-E01W	1x5W	450lm	3000K/4000K	38°	White / Black	102x102x100mm
SP001-E02W	2x5W	900lm				202x102x100mm
SP001-E04W	4x5W	1800lm				202x202x100mm

MODULE

Module & Accessories Combination



MODULE & EXTENTION TRIM

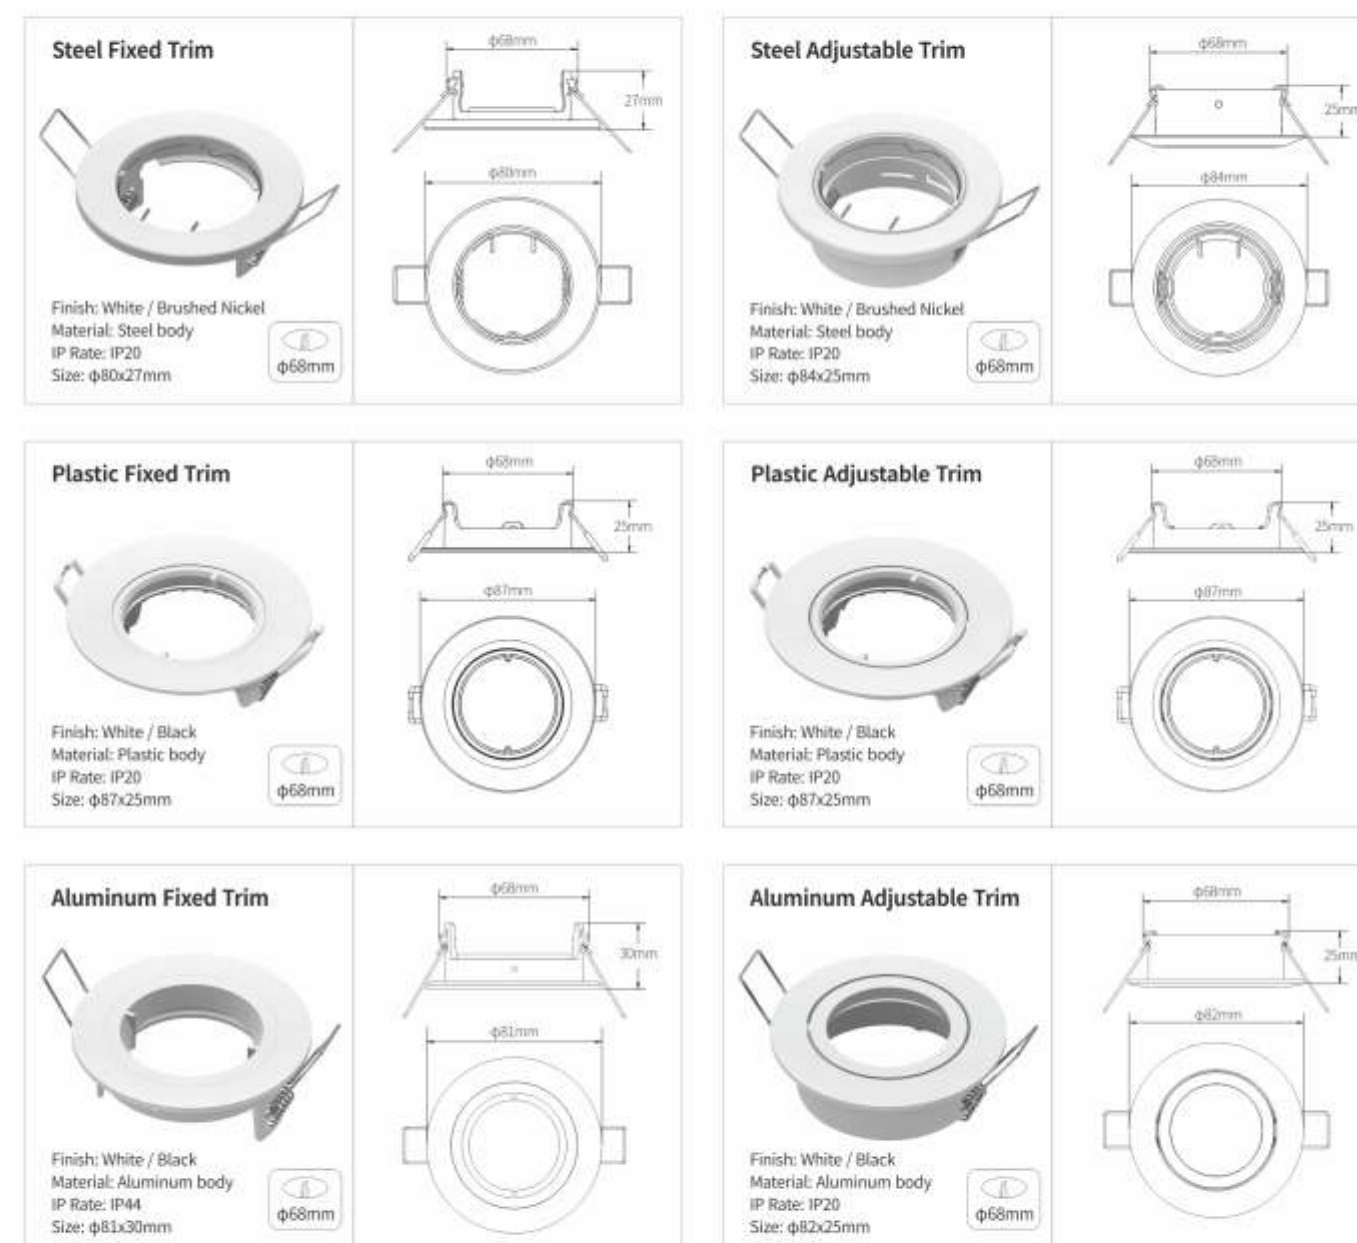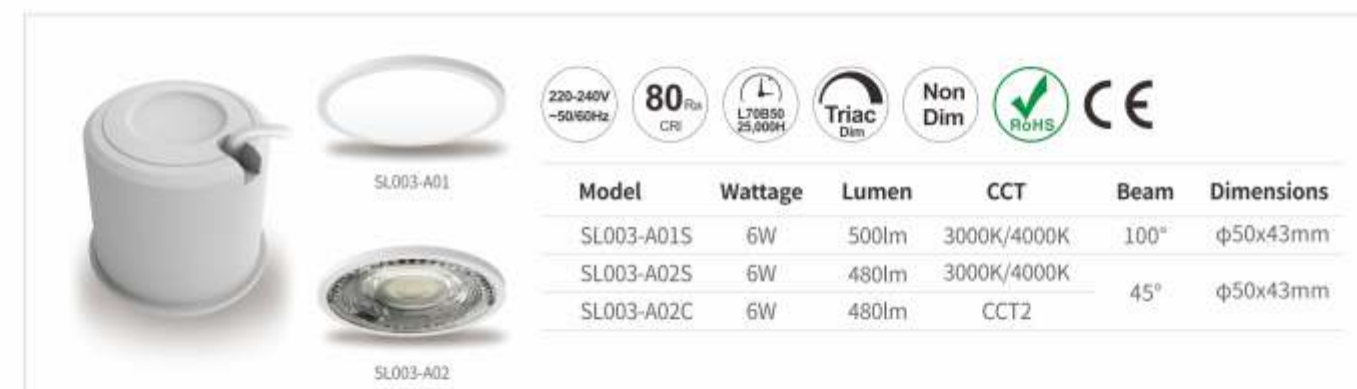

GECO



SL003-GU10B01



SL003-GU10B02



SL003-GU10B03



Application

Restaurant, coffee shop, bar, home, office, shops, hotel etc.

This product works well with the below popular fixtures in Euro market.



The affordable LED spot solution

Features

- Cob-like lens , more elegant looking
- Compatible with **Leading edge** and **trailing edge** dimmers
- Comply with ERP 2019/2020 and **new EMC** standard in 2022
- Dim and non dim optional
- Up to **100lm/W**@4000K version
- 2 years warranty



Model	Wattage	Lumen	CCT	Beam	Dimensions
SL003-GU10B01	4.8W	420lm/430lm/450lm	2700K/3000K/4000K	38°	ø49x55mm
SL003-GU10B02	4.8W	400lm/410lm/430lm	2700K/3000K/4000K	100°	
SL003-GU10B03	4.8W	420lm	CCT2	38°	



RESIDENTIAL

LED Downlight

FLYING	Backlit downlight	085 - 085
CREPE	Sidelit downlight	086 - 086
BAGEL	Cabinet light	087 - 088



Residential Downlight

■ FLYING - Backlit



DL002-A25 085 DL002-A30 085 DL002-A35 085 DL002-A40 085 DL002-A60 085 DL002-A80 085

■ CREPE - Sidelit



DL001-075R 086 DL001-100R 086 DL001-125R 086 DL001-150R 086 DL001-220R 086



DL001-075S 086 DL001-110S 086 DL001-125S 086 DL001-150S 086 DL001-220S 086

■ BAGEL - Cabinet light



DL008-A01 087 DL008-B01 087



FLYING



Application

Corridor, Aisle, Circulation area

Features

- The smooth housing ensures uniform heat dissipation, easy to install and easy to carry.
- A variety of sizes are available.
- Integral spring fixture retention clamps are strong and flexible and can bend up to 150 degrees making it much easier to install and mount on the ceiling.
- Solid-state construction for high shock and vibration resistance. Suitable for home ceiling and Type CE Rated – this light is perfect fit for installation in slopes and locations with less ceiling clearance.



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL002-A25	3.5W	250lm	3000K/4000K/6500K	110°	φ75mm	φ94x46mm
DL002-A30	5W	360lm			φ80mm	φ98x46mm
DL002-A35	6.7W	510lm			φ95mm	φ108x48mm
DL002-A40	9W	680lm			φ105mm	φ125x48mm
DL002-A60	15W	1300lm			φ150mm	φ167x48mm
DL002-A80	20W	1800lm			φ200mm	φ215x48mm

CREPE



Features

- Integrated slim design
- No flicker, comfortable and natural light
- Intelligent driver with short-circuit protection, improve safety performance
- High-quality springs with plastic protective sleeves, ensure installation convenient and safe


Built-in driver

Easy installation



Ultra-slim


Ultra-slim design for narrow space



Application

Home, Office, Shop, Hotel etc.

Line Art

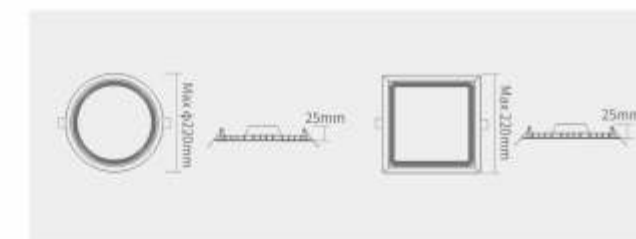

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL001-075R	3W	200lm	3000K/4000K/6500K	110°	φ75mm	φ93x25mm
DL001-100R	6W	350lm			φ100mm	φ118x25mm
DL001-125R	9W	700lm			φ125mm	φ143x25mm
DL001-150R	12W	900lm			φ150mm	φ168x25mm
DL001-220R	18W	1600lm			φ200mm	φ220x47mm
DL001-075S	3W	200lm	3000K/4000K/6500K	110°	75x75mm	93x47mm
DL001-100S	6W	350lm			100x100mm	118x47mm
DL001-125S	9W	700lm			125x125mm	143x47mm
DL001-150S	12W	900lm			150x150mm	168x47mm
DL001-220S	18W	1600lm			200x200mm	220x47mm

BAGEL




Application

Wardrobe, Cupboard, Bookcase, Cabinet.

Accessories



Line Art

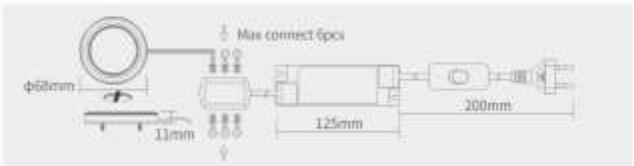

Features

- Slim body, 24mm height
- Constant current output
- 6pcs with a junction box and one driver
- White and brushed nickel color optional
- Easy wiring and installing


Ultra-slim

Ultra-slim design for narrow space



2 Installations

2 installation; Recessed and surface-mounted



External Drive



6pcs with a junction box and one driver



Model	Wattage	Lumen	CCT	Beam	Finish	Installation	Cut hole	Dimensions
DL008-A	2.5W	190lm	3000K	100°	White/Brushed Nickel	Recessed	φ63mm	φ68x11mm
DL008-B	2.5W	190lm	3000K	100°	White/Brushed Nickel	Surface-mounted	/	φ68x11mm



LED CEILING AND WALL LIGHT

■ Ben LT01-A06-13
091■ Adeline CL02-A21
092CL02-A28
092■ Moon CL03-A01
093■ Muffin CL04-A01
095CL04-B01
095CL04-C01
095■ CD Mirror CL002-A11
097CL002-A15
097CL002-A24
097CL002-D12
098BEN
LED BATTEN LIGHT

Standard version

Emergency version

Sensor version

Sensor + Emergency version

BEN



Features

- Uniform light : SDCM<4
- IP54 for wet applications
- High light efficiency: 110lm/W
- Iron housing, good cooling capacity
- Designed to last up to 50,000 hours, 5years' warranty
- $\pm 90^\circ$ (Total 180°) Tiltable motion sensor
- 5m Motion sensor detection range
- 0-10V dimming , PIR sensor, Emergency functions optional

Application

Office, school, subway station, hospital



Model	Wattage	Lumen	CCT	Beam	Dim	IP Rate	Dimensions
LT01-A06-13	12W	1320lm	3000K/4000K/6500K	120°	0-10V	IP20 / IP54	670x72x80mm
LT01-A06-18	17W	1900lm	3000K/4000K/6500K	120°	0-10V	IP20 / IP54	670x72x80mm
LT01-A12-18	16.5W	1900lm	3000K/4000K/6500K	120°	0-10V	IP20 / IP54	1225x72x80mm
LT01-A12-26	24.5W	2700lm	3000K/4000K/6500K	120°	0-10V	IP20 / IP54	1225x72x80mm
LT01-A12-38	35W	4000lm	3000K/4000K/6500K	120°	0-10V	IP20 / IP54	1225x72x80mm

ADELINE



Features

- Plastic frame with wood, white and black finishing. Unique colors clashing design is available
- PMMA diffuser, light transmittance is up to 80%
- Switch CCT 2700K - 4000K - 6500K
- 25000 hours lifespan, high lighting efficiency 90lm/w
- CE, RoHS and new ERP 2019/2015 compliant
- WiFi function is optional
- Night light mode for RF version



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL02-A21	21W	1900lm	2700K/4000K/6500K	90lm/W	100°	φ300x50mm
CL02-A28	28W	2800lm	2700K/4000K/6500K	100lm/W	100°	φ450x60mm



Application

Bedroom, Livingroom, Corridor, Aisle, Circulation area

CCT selectable by dip switch and wall switch



Dimming by dimmer or RF control



MOON




Application

Corridor, Aisle, Circulation area



Features

- Ceiling and wall luminaires for indoor use
- High Ingress protection rating: IP54
- Multi CCT: a button on the lamp to choose the CCT you need
- Multi power: a button on the lamp to choose the power you need
- Sensor, DALI, emergency function optional
- Comply with new ERP and EMC
- Can work with BESA box (51mm & 78mm)
- Up to 100lm/W
- 5 years warranty



Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimensions
CL03-A01	20W-25W	2200lm-2600lm	CCT2(3000K-4000K)	100°	IP54	φ300x52mm
CL03-A02	10W-15W	1100lm-1600lm	CCT2(3000K-4000K)	100°	IP54	φ200x52mm



MUFFIN



IP66



Application


Outdoor walls, pools and other wet scenes

Can be connected to solar panels



Features

- Ceiling and wall luminaires for outdoor use
- High ingress protection rating: IP66
- Multi CCT: a button on the lamp to choose the CCT you need
- Multi power: a button on the lamp to choose the power you need
- Sensor, DALI, emergency function optional
- Comply with new ERP and EMC
- Up to 100lm/W
- 5 years warranty



Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimensions
CL04-A01	20W-25W	2200lm-2600lm	CCT2(3000K-4000K)	100°	IP66	φ300x60mm
CL04-A02	10W-15W	1100lm-1600lm	CCT2(3000K-4000K)	100°	IP66	φ200x60mm
CL04-B01	20W-25W	2200lm-2600lm	CCT2(3000K-4000K)	100°	IP66	φ300x60mm
CL04-B02	10W-15W	1100lm-1600lm	CCT2(3000K-4000K)	100°	IP66	φ200x60mm
CL04-C01	20W-25W	2200lm-2600lm	CCT2(3000K-4000K)	100°	IP66	φ300x60mm
CL04-C02	10W-15W	1100lm-1600lm	CCT2(3000K-4000K)	100°	IP66	φ200x60mm

Connected to solar panels for use



Automatically turns off and charging during the day



Turn on when it senses movement at night



If movement stay active the light will remain on



Turn off after 30 seconds of no movement

CD MIRROR



Surface-mounted



Pendant (with long pole)



Pendant (with metal wire)



Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- 5 years warranty



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL002-A11	15W	1500lm	3000K/4000K/5000K	100lm/W	120°	φ300x80mm
CL002-A15	25W	2500lm				φ480x80mm
CL002-A24	50W	5000lm				φ600x80mm

CD MIRROR



White



Black



Application

Home, Office, Shop, Hotel etc.

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- UGR 19
- 5 years warranty



Ultra-slim

Ultra-slim design for narrow space



2 installations

Surface-mounted and pendant



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
CL002-D12	15W	1500lm	3000K/4000K/5000K	120°	Black/White	φ300x551mm
CL002-D16	25W	2500lm				φ480x551mm
CL002-D24	40W	4000lm				φ600x551mm

SMART LIGHTING



Product Index

Smart Ambient Light



WL001
104

Smart Light Source



WL001-GU10101
107



WL001-GU10201
108



WL001-A60201
109



WL001-BR3001
110

Smart Down Light



WL001-NAD401
112



WL001-G3A101
113



WL001-G3A301
113



WL001-D1701
114

Smart Ceiling Light



WCL002-300
115



WPD001-606D
116



CL003-W11
117



CL004-W12
118


Smart Fire Rated Down Light



WL001-FG3A03
119



WL001-D36A03
120

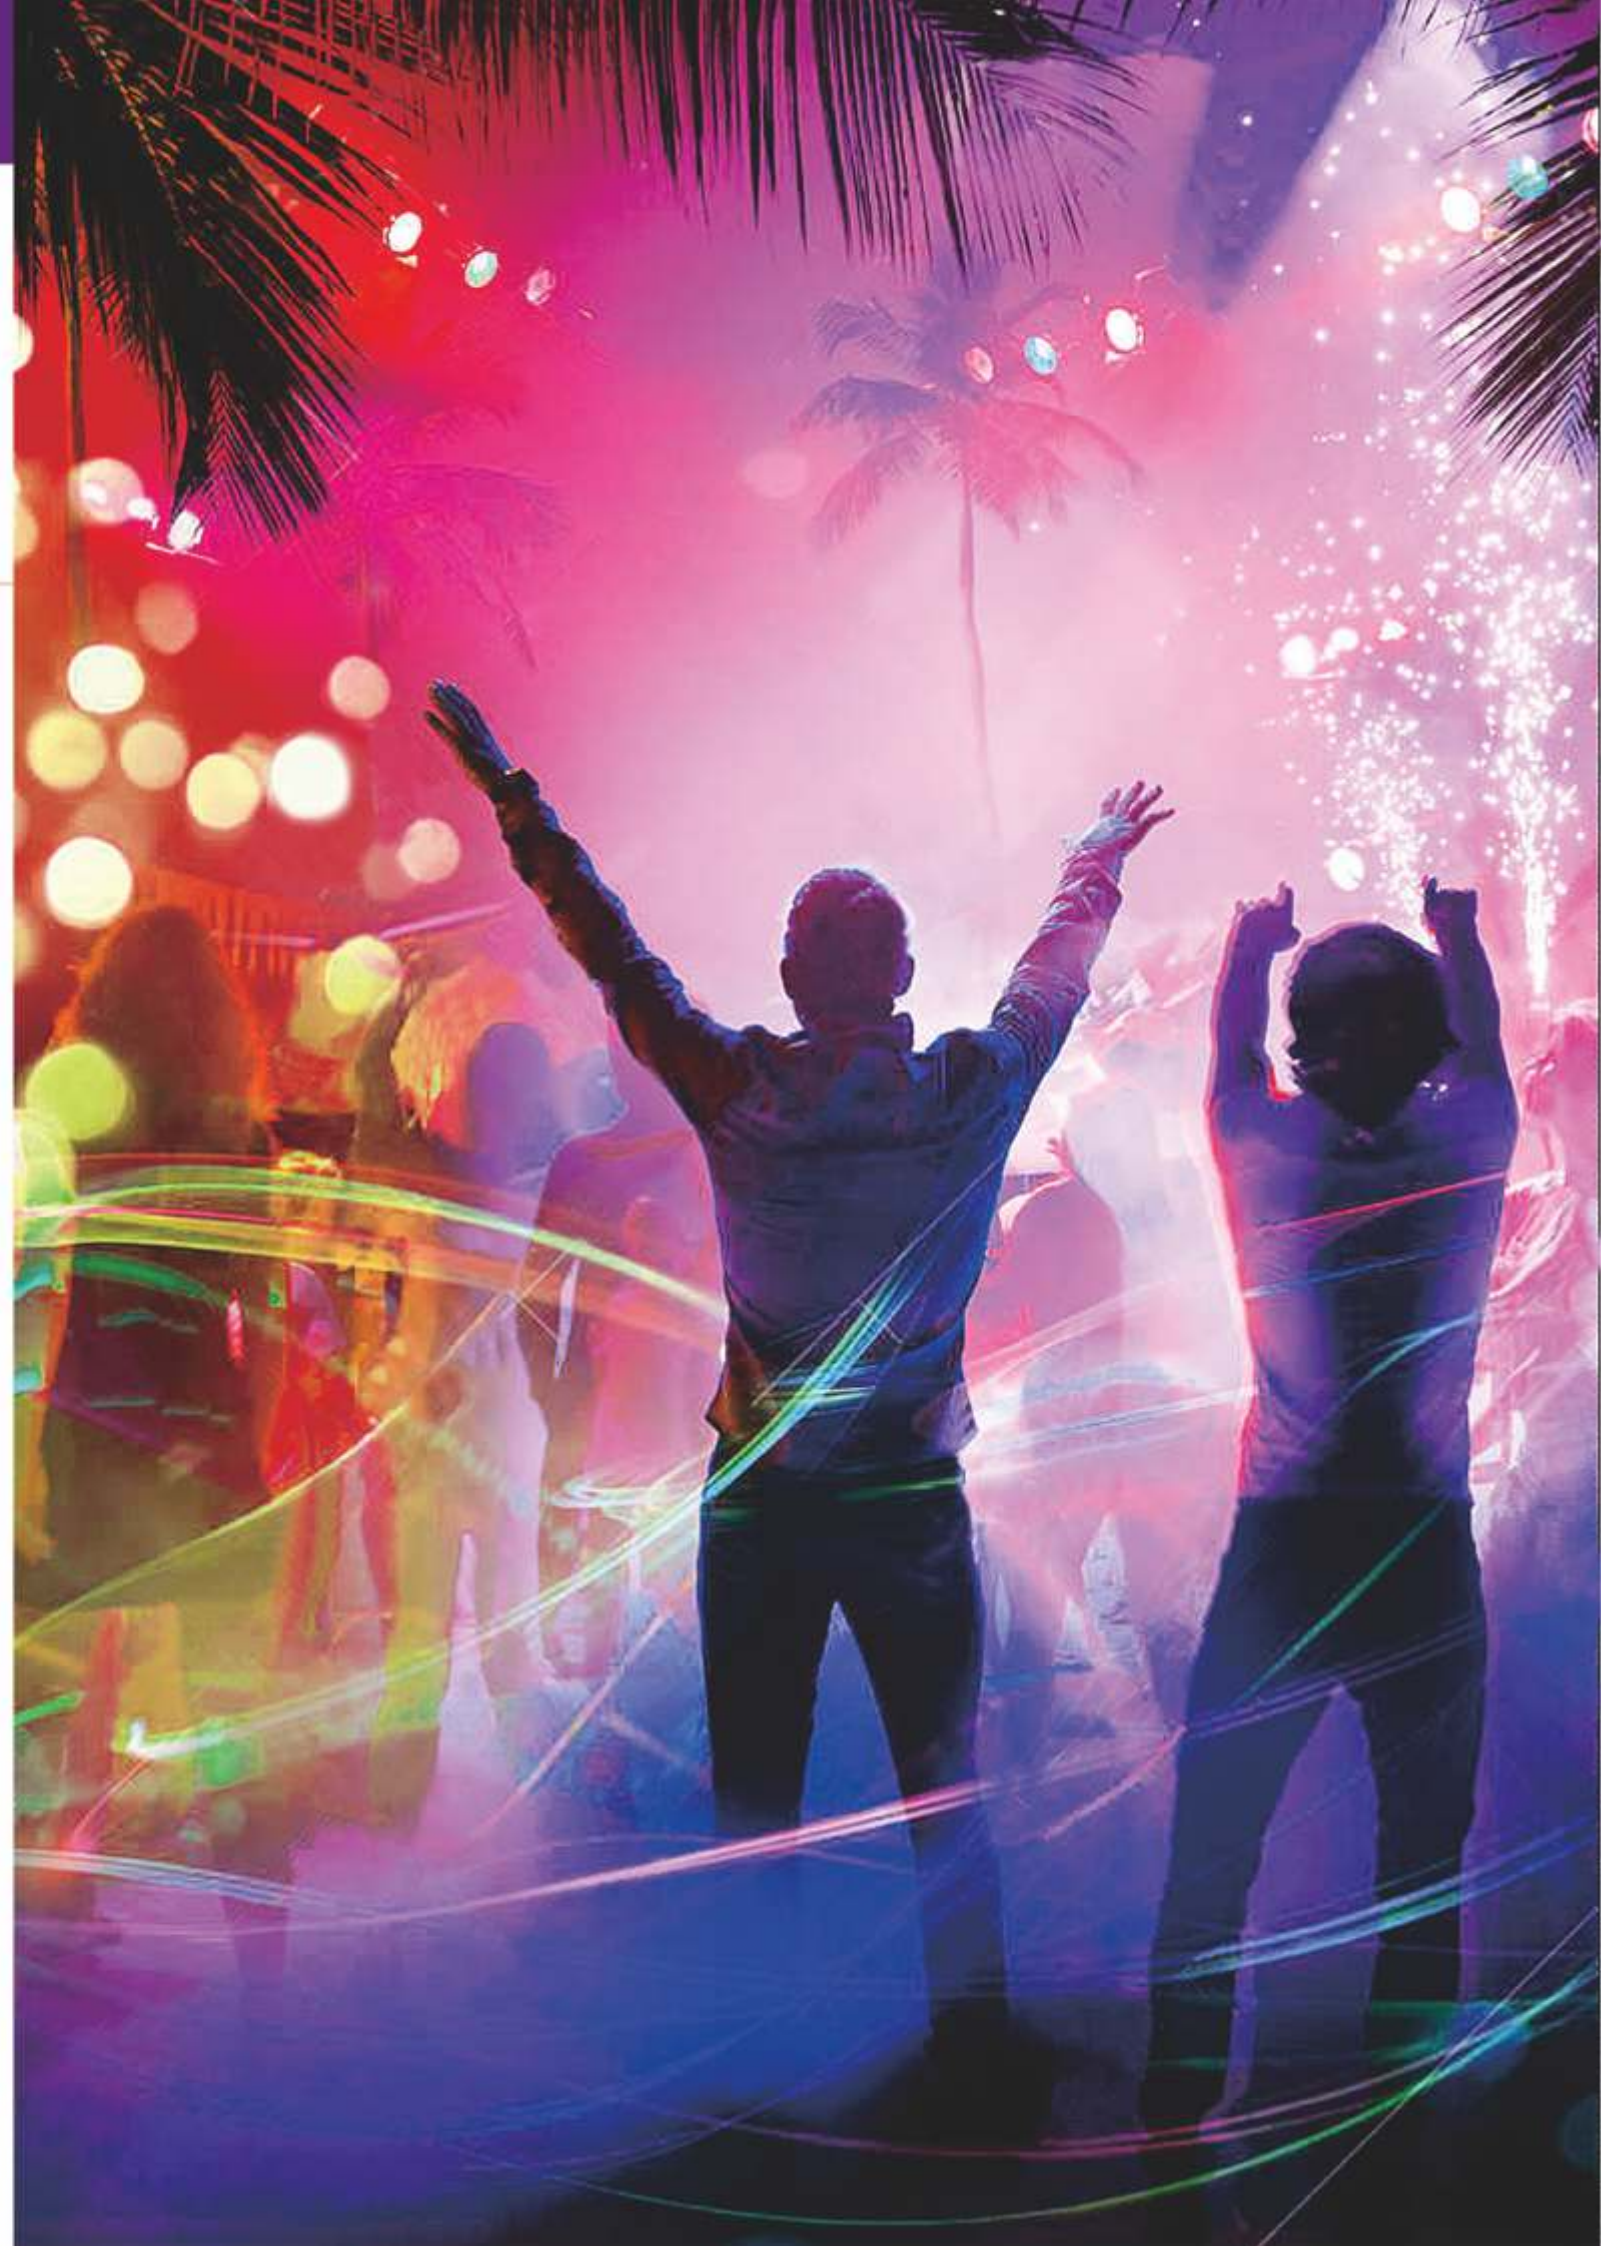

Smart Home System



LED Smart Products



Technical comparison

	Bluetooth	Zigbee	WiFi	Sig mesh
Communication	Independent	Mesh	Network	Mesh
Long range control	/	Need Gateway	/	Need Gateway
Devices connect number	8	<10-100	<10-100	Over 150
Coverage area	<10m	10-75m	10-50m	Theoretically no limit with 2 Devices in 100m
PowerConsumer	Low	Medium	High	Low
Setup	Simple	Complex	Simple	Simple
Cost	Cheap	Expensive	Expensive	Cheap
Network size	Small	Medium	Medium	Big
Response speed	Fast	Slow	Slow	Fast
Security level	High	High	Low	High
Network Stability	Stable	Stable	Unstable	Stable

Features

- Voice & APP control, No gateway required with WIFI devices
- Dim, CCT, RGBCW function optional
- 16,000,000 colors in RGB mode
- Work with Google Assistant, Amazon Alexa
- Work with Sensor, Remote control simplifies operation in Bluetooth devices



SMART AMBIENT LIGHT

works with the
Google AssistantWORKS WITH
alexaWorks with
Tuya

Application

Home, Bar, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- Tool-free installation
- AC120V / AC230V



Model	Wattage	Lumen	CCT
Wal001	24W	1200lm	2700K~6500K+RGBCW



SMART GU101



Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC230V



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GU10102	4.8W	350lm	2700K~6500K	100°	φ50x60mm
WL001-GU10105			2700K~6500K+RGB		
BL001-GU10102	4.8W	350lm	2700K~6500K	100°	φ50x60mm
BL001-GU10105			2700K~6500K+RGB		

SMART GU102



Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC230V



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GU10202	4.8W	350lm	2700K~6500K	38°	φ50x54mm
WL001-GU10205			2700K~6500K+RGB		
BL001-GU10202	4.8W	350lm	2700K~6500K	38°	φ50x54mm
BL001-GU10205			2700K~6500K+RGB		

SMART BULB



BASE: E27



BASE: B22



BASE: E26



Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC100V / AC230V optional



Model	Wattage	Lumen	CCT	Beam	Base type	Dimensions
WL001-A60202	9W	806lm	2700K-6500K	180°	E26/E27/B22	φ60x119mm
WL001-A60205			2200K-6500K+RGB			
BL001-A60202	9W	806lm	2700K-6500K	180°	E26/E27/B22	φ60x119mm
BL001-A60205			2700K-6500K+RGB			

SMART BR30



Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Base type	Dimensions
WL001-BR3002	12W	1200lm	2700K-6500K	120°	E26	φ95x128mm
WL001-BR3005			2700K-6500K+RGB			
BL001-BR3002	12W	1200lm	2700K-6500K	120°	E26	φ95x128mm
BL001-BR3005			2700K-6500K+RGB			

SMART DOWN LIGHT-NA

works with the
Google Assistant

WORKS WITH
alexa

Works with
Tuya



Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-NAD402	10W	800-850lm	2700K~6500K	60°	φ100mm	φ140x56mm
WL001-NAD405			2700K~6500K+RGB			
BL001-NAD402	10W	800-850lm	2700K~6500K	60°	φ100mm	φ140x56mm
BL001-NAD405			2700K~6500K+RGB			
WL001-NAD602	15W	1200-1275lm	2700K~6500K	60°	φ150mm	φ186x56mm
WL001-NAD605			2700K~6500K+RGB			
BL001-NAD602	15W	1200-1275lm	2700K~6500K	60°	φ150mm	φ186x56mm
BL001-NAD605			2700K~6500K+RGB			

SMART DOWN LIGHT-G3A1




WL001-G3A1



WL001-G3A3

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-G3A102	4.8W	320lm	2700K-6500K	100°	φ70mm	φ86x47mm
WL001-G3A105			2700K-6500K+RGB			
BL001-G3A102	4.8W	320lm	2700K-6500K	100°	φ70mm	φ86x47mm
BL001-G3A105			2700K-6500K+RGB			
WL001-G3A302	4.8W	320lm	2700K-6500K	38°	φ70mm	φ86x47mm
WL001-G3A305			2700K-6500K+RGB			
BL001-G3A302	4.8W	320lm	2700K-6500K	38°	φ70mm	φ86x47mm
BL001-G3A305			2700K-6500K+RGB			

SMART DOWN LIGHT-D1701




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-D1702	15W	1350lm	2700K-6500K	100°	φ150mm	φ170x48mm
WL001-D1705			2700K-6500K+RGB			
BL001-D1702	15W	1350lm	2700K-6500K	100°	φ150mm	φ170x48mm
BL001-D1705			2700K-6500K+RGB			

SMART CEILING LIGHT




Application

Bedroom, Livingroom, Corridor, Aisle, Circulation area



Features

- Plastic frame with wood, white and black finishing. Unique colors clashing design is available
- PMMA diffuser, light transmittance is up to 80%
- 25000 hours lifespan, high lighting efficiency 90lm/w
- CE, RoHS and new ERP 2019/2015 compliant
- WiFi function is optional



Model	Wattage	Lumen	Efficacy	CCT	Beam	Dimensions
WCL002-300	21W	2100lm	100lm/W	2700K-6000K	100°	φ300x50mm
BCL002-300						

SMART CEILING LIGHT



Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size φ 50-260mm
- Dimming, non-dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm

Cut Out

For φ50mm-φ260mm cut hole



Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



Color of Bezels optional



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WPD001-818D	15W	1300lm	2700K-6500K+RGB	110°	φ65-185mm	φ217x22mm
WPD001-1121D	18W	1700lm			φ65-260mm	φ290x22mm

SMART CEILING LIGHT



Surface-mounted



Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant




Pendant (with long pole)



Pendant (with metal wire)

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- 5 years warranty



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL003-W11	15W	1500lm	2700K-6000K	100lm/W	120°	φ300x80mm
CL003-W15	25W	2000lm				φ480x80mm
CL003-W24	50W	4000lm				φ600x80mm
CL003-B11	15W	1500lm	2700K-6000K	100lm/W	120°	φ300x80mm
CL003-B15	25W	2000lm				φ480x80mm
CL003-B24	50W	4000lm				φ600x80mm

SMART CEILING LIGHT



White



Black



Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- UGR 19
- 5 years warranty


Ultra-slim

Ultra-slim design for narrow space



2 installations

Surface-mounted and pendant



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
CL004-W12	15W	1500lm	2700K-6000K	120°	Black/White	φ300x551mm
CL004-W16	25W	2000lm				φ480x551mm
CL004-W24	40W	4000lm				φ600x551mm
CL004-B12	15W	1500lm	2700K-6000K	120°	Black/White	φ300x551mm
CL004-B16	25W	2000lm				φ480x551mm
CL004-B24	40W	4000lm				φ600x551mm

SMART FIRE RATED DOWNLIGHT

works with the Google Assistant

WORKS WITH alexa

Works with Tuya



IP65

Features

- Smart Life APP control, no gateway required
- Dim and CCT
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- 90 min anti-fire test

Fire-rated

Pass 90min anti-fire test



Quick install

Screw free
Loop in loop out



Application

Home, Hotels

Color of Bezels optional



Brushed Nickel





Chrome



White



Black



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-FG3A03	8.5W	700lm	3000K-6500K	60°	φ70mm	φ88x65mm
BL001-FG3A03						

SMART 360° FIRE RATED DOWNLIGHT

works with the Google Assistant

WORKS WITH alexa

Works with Tuya



IP65

Features

- Smart Life APP control, no gateway required
- Dim and CCT, 360° rotation
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- 90 min anti-fire test
- Tooling free design

Fire-rated

Pass 90min anti-fire test



360° Rotation

30° tiltable at all directions



Quick install

Screw free
Loop in loop out



Application

Home, Hotels

Three color finishing optional



Black



Silver



White



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
WL001-D36A03	8.5W	720lm	3000K-6500K	38°	Black/White/Silver	φ85mm	φ96x40mm
BL001-D36A03							